



OUTDOOR SERIES
500X500 11MM



Plush
of prominence

HEAVY DUTY FLOOR & PARKING TILES 11 mm THICKNESS

500x500 mm



Punch Finish



EQ-5502




EQ-5503




HEAVY DUTY FLOOR & PARKING TILES 11 mm THICKNESS


500x500 mm

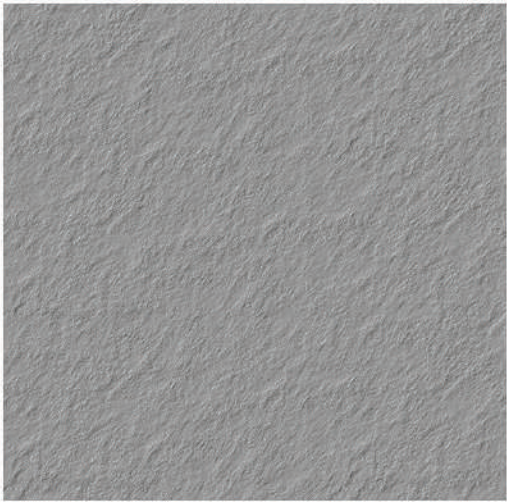

Punch Finish

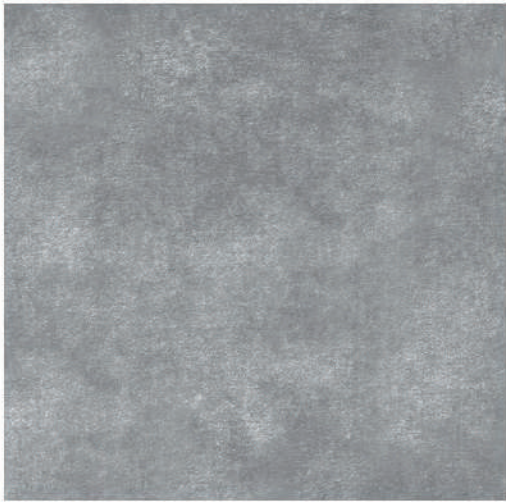

EQ-5504

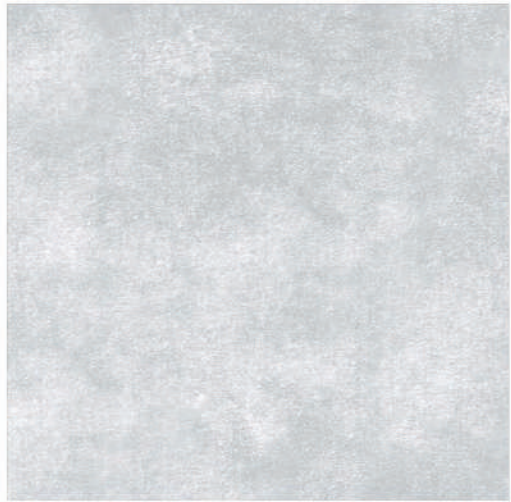

EQ-5505



Formats 40x40cm 11mm thickness are available in anti slip.


VB

AB

CD

HEAVY DUTY FLOOR & PARKING TILES 11 mm THICKNESS

500x500 mm

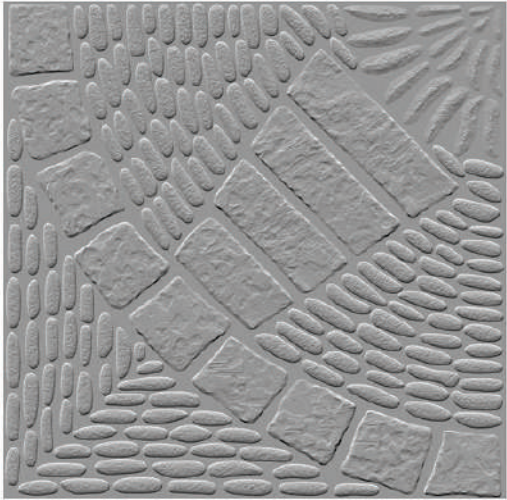

Punch Finish



EQ-5512



Formats 40x40cm 11mm thickness
are available in anti slip.

VB

88

V2

AB
CD

HEAVY DUTY FLOOR & PARKING TILES 11 mm THICKNESS

500x500 mm



Punch Finish



EQ-5511



Formats 40x40cm 11mm thickness
are available in anti slip.

VB

88

V2

AB
CD

HEAVY DUTY FLOOR & PARKING TILES 11 mm THICKNESS


500x500 mm



Punch Finish



EQ-5510

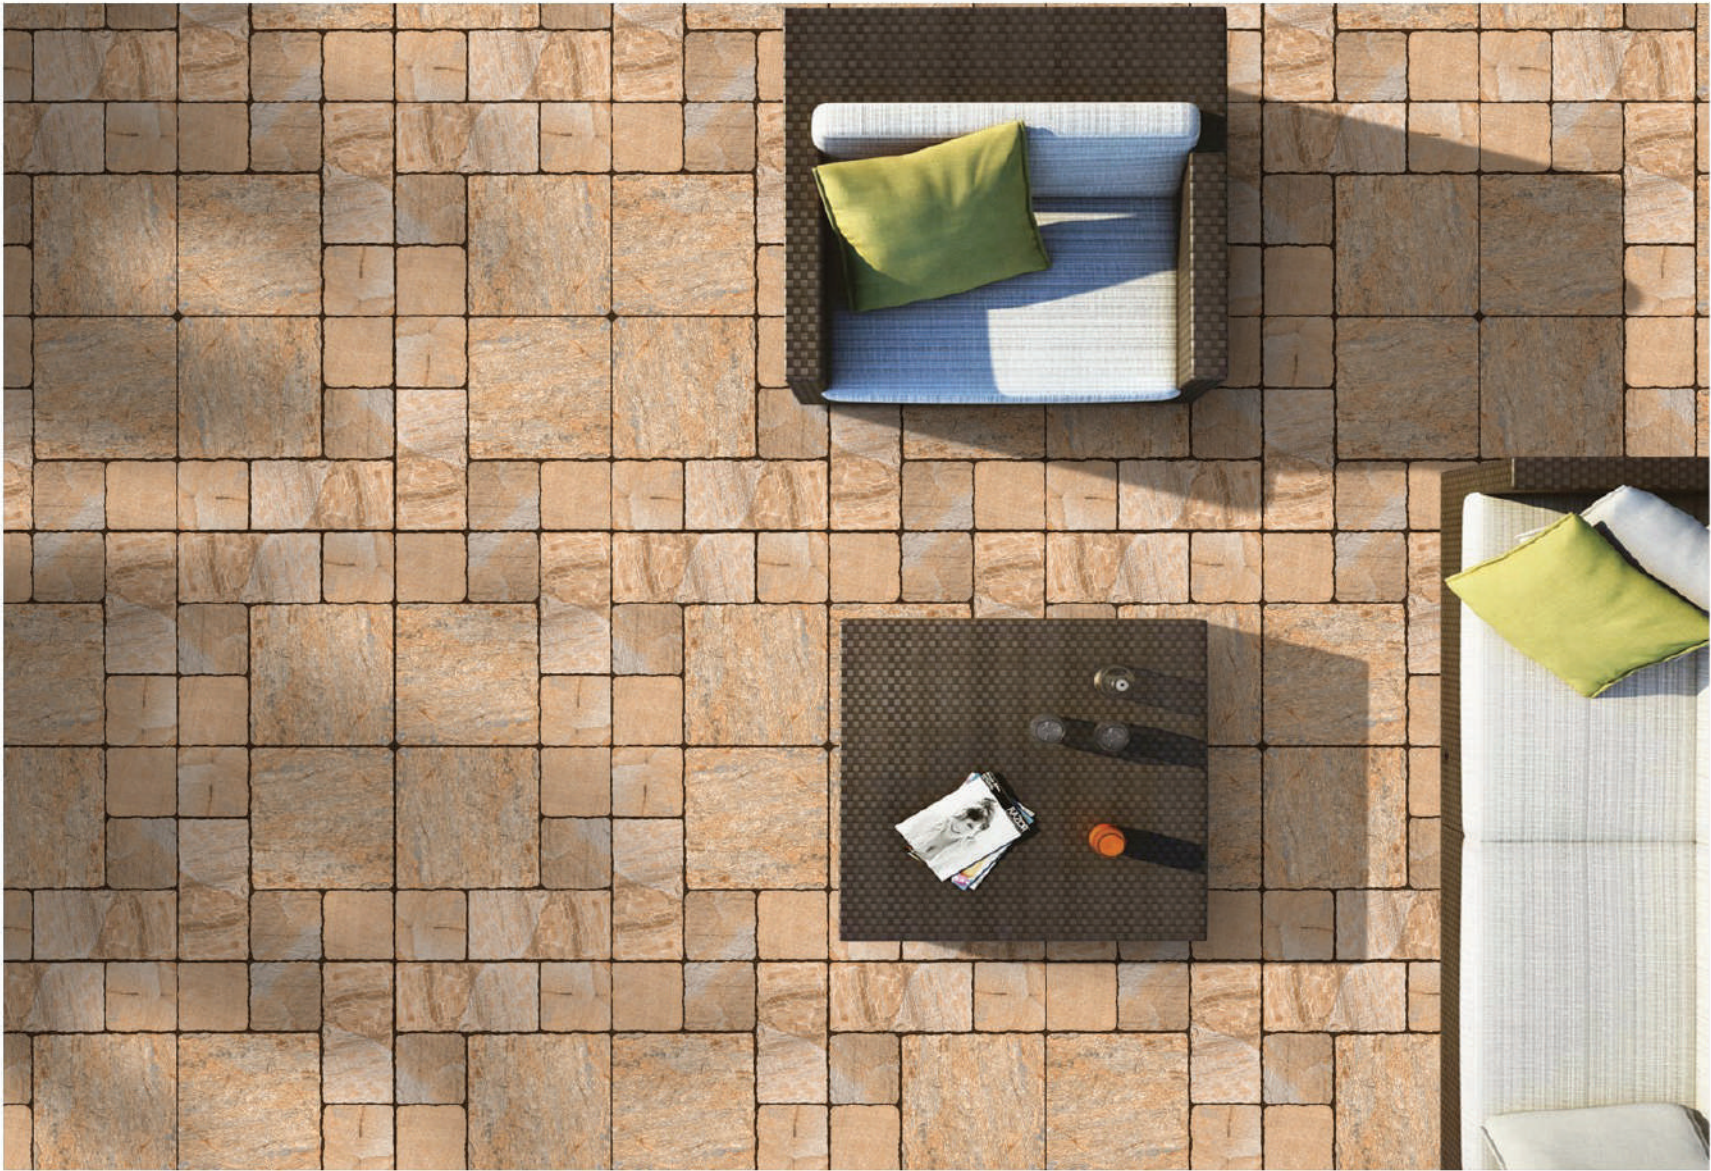

Formats 40x40cm 11mm thickness are available in anti slip.

VB

88

V2


AB
CD

HEAVY DUTY FLOOR & PARKING TILES 11 mm THICKNESS

500x500 mm



Plain Finish

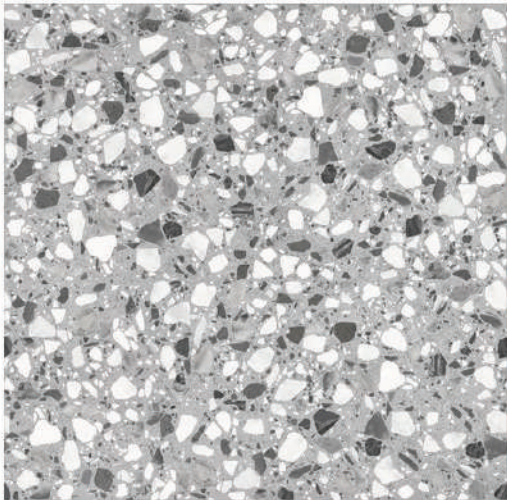

EQ-5501



Formats 40x40cm 11mm thickness
are available in anti slip.

VB


88

V2


AB
CD

HEAVY DUTY FLOOR & PARKING TILES 11 mm THICKNESS

500x500 mm

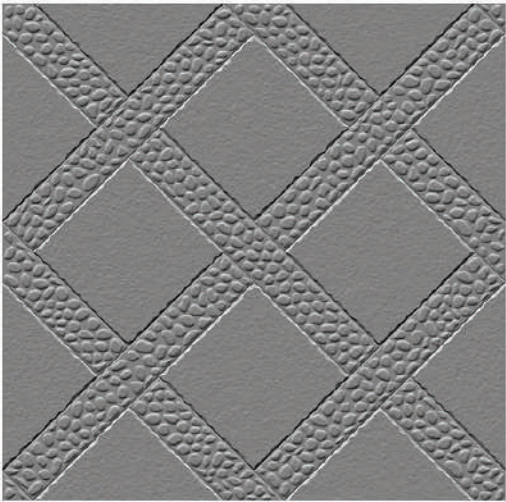

Punch Finish

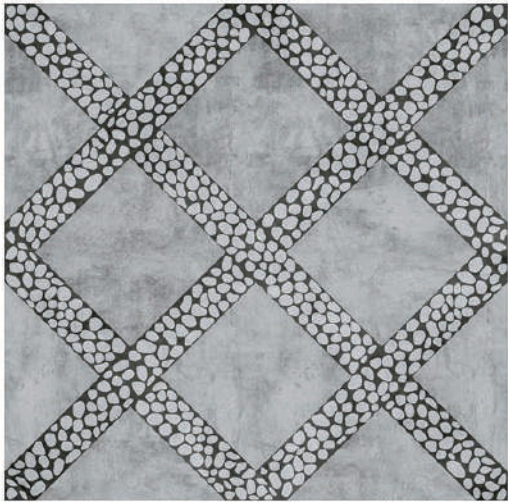

EQ-5509



Formats 40x40cm 11mm thickness
are available in anti slip.

VB


88

V2

AB
CD

HEAVY DUTY FLOOR & PARKING TILES 11 mm THICKNESS

500x500 mm

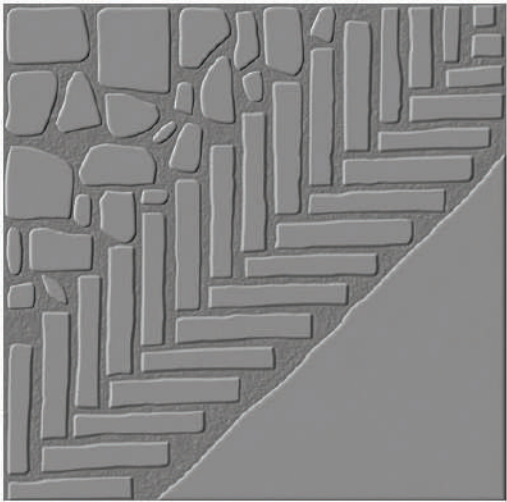

Punch Finish



EQ-5508



Formats 40x40cm 11mm thickness
are available in anti slip.

VB


88

V2

AB
CD

HEAVY DUTY FLOOR & PARKING TILES 11 mm THICKNESS

500x500 mm

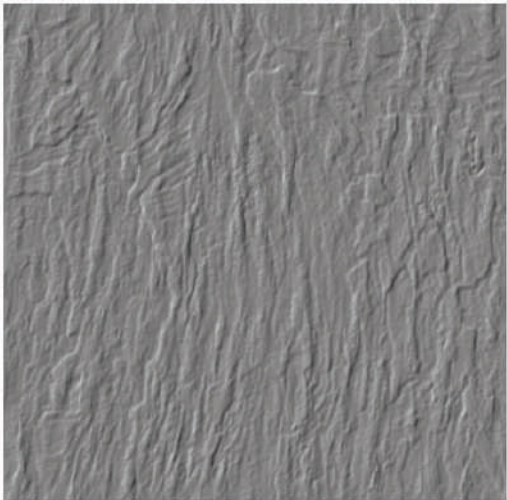

Punch Finish



EQ-5507




Formats 40x40cm 11mm thickness
are available in anti slip.




HEAVY DUTY FLOOR & PARKING TILES 11 mm THICKNESS

500x500 mm

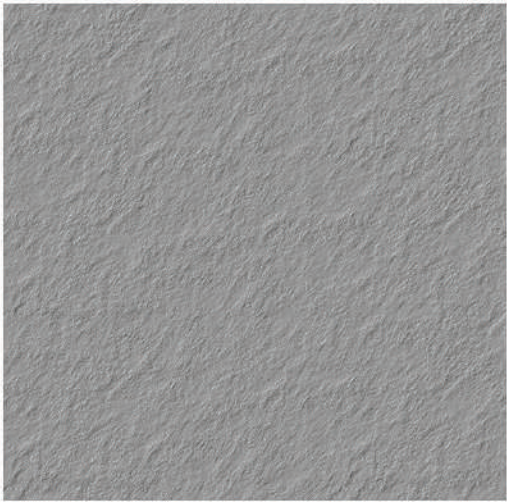

Punch Finish

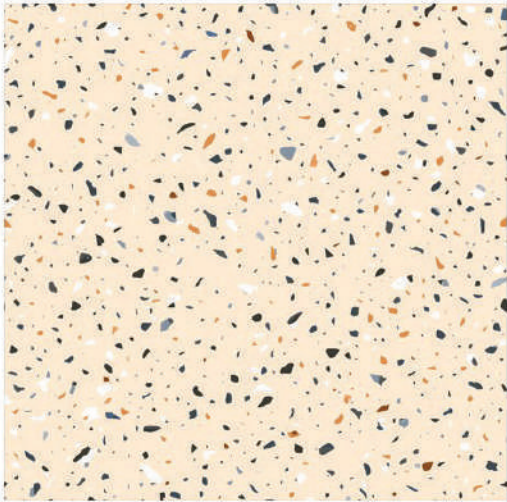

EQ-5506



Formats 40x40cm 11mm thickness
are available in anti slip.

VB

88

V2

AB
CD

PACKING DETAILS

Sr.No.	Size	Thickness	No.of Tiles Per Box	Coverage Area in Sq. Feet	Approx. Weight / Box
1	500x500 mm	11mm (Approx)	4	10.76sq.ft. (Approx)	22.5 kgs. (Approx)

DISCLAIMER: Parking Tiles reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime, the colors shown of tiles in this catalogue are purely illustrative and limited to printing process, please refer actual sample before final selection, the details of sizes, colors, references should be verified for typographical errors.

TECHNICAL SPECIFICATION

Sr.No.	Pictogram	Property	International Std.	Tiles Value	Test Method
1		Length & Width	± 0.3%	± 0.18%	ISO-10545-2
2		Thickness	± 5.0%	± 1.65%	ISO-10545-2
3		Straightness Of Sides	± 0.3%	± 0.06%	ISO-10545-2
4		Rectangularity	± 0.3%	± 0.07%	ISO-10545-2
5		Water Absorption %	<3.3%	<2-3%	ISO-10545-3
6		Modulus Of Rupture (MOR)	>27 N/mm ²	30 N/mm ²	ISO-10545-4
7		Braking Strength In N	>1100N	2102N	ISO-10545-4
8		Surface Abrasion Resistance	Class IV	Class IV	ISO-10545-7
9		Bulk Density , In (g/cc)	>2.2	2.9 g/cc	ISO-10545-3
10		Frost Resistance	Frostproof	Frostproof	ISO-10545-12
11		Chemical Resistance	No Damage	No Damage	ISO-10545-13
12		Thermal Shock Resistance	No Damage	No Damage	ISO-10545-9
13		Coefficient Of Liner Thermal Expansion	< 9 x 10 ⁻⁶	5.53 x 10 ⁻⁶	ISO-10545-8
14		Staining Resistance	Resistance	Resistance	ISO-10545-14
15		Moisture Expansion mm/m	Nil	Nil	ISO-10545-10
16		Surface Flatness	± 0.4%	± 0.04	ISO-10545-2
17		Surface Quality	> 95%	100%	ISO-10545-2
18		Crazing Resistance	Two Cycle Must Pass	Fully Resistance	ISO-10545-11



www.volarktiles.com