



OUTDOOR SERIES
500X500 15MM



A ROBUST EDGE OF CLASSY
creations

www.volarktiles.com

HEAVY DUTY FLOOR & PARKING TILES 15mm THICKNESS

500x500 mm



volark
TILES



VL-5554



Formats 50x50 cm 15 mm thickness
are available in anti slip.

VB



V2

AB
CD

HEAVY DUTY FLOOR & PARKING TILES 15mm THICKNESS

500x500 mm



volark
TILES



VL-5560



Formats 50x50 cm 15 mm thickness
are available in anti slip.

VB



V2

AB
CD

HEAVY DUTY FLOOR & PARKING TILES 15mm THICKNESS

500x500 mm



VL-5551



Formats 50x50 cm 15 mm thickness are available in anti slip.

VB

88

V2

AB
CD

HEAVY DUTY FLOOR & PARKING TILES 15mm THICKNESS

500x500 mm



VL-5562



Formats 50x50 cm 15 mm thickness
are available in anti slip.




HEAVY DUTY FLOOR & PARKING TILES 15mm THICKNESS

500x500 mm



volark
TILES

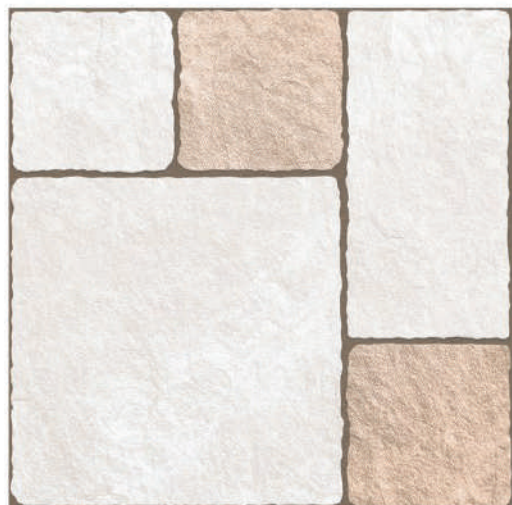

VL-5561



Formats 50x50 cm 15 mm thickness
are available in anti slip.

VB



88



V2

AB
CD

HEAVY DUTY FLOOR & PARKING TILES 15mm THICKNESS

500x500 mm



VL-5555



Formats 50x50 cm 15 mm thickness
are available in anti slip.

VB

88

V2

AB
CD

HEAVY DUTY FLOOR & PARKING TILES 15mm THICKNESS

500x500 mm



VL-5556



Formats 50x50 cm 15 mm thickness
are available in anti slip.

VB

V2

AB

CD

HEAVY DUTY FLOOR & PARKING TILES 15mm THICKNESS

500x500 mm



VL-5557



Formats 50x50 cm 15 mm thickness
are available in anti slip.



HEAVY DUTY FLOOR & PARKING TILES 15mm THICKNESS

500x500 mm



VL-5558



Formats 50x50 cm 15 mm thickness
are available in anti slip.

VB

88

V2

AB
CD

HEAVY DUTY FLOOR & PARKING TILES 15mm THICKNESS

500x500 mm



volark
TILES



VL-5559



Formats 50x50 cm 15 mm thickness
are available in anti slip.

VB



V2

AB
CD

HEAVY DUTY FLOOR & PARKING TILES 15mm THICKNESS

500x500 mm



volark
TILES



VL-5552



VL-5553



Formats 50x50 cm 15 mm thickness
are available in anti slip.

VB



PACKING DETAILS

Sr.No.	Size	Thickness	No.of Tiles Per Box	Coverage Area in Sq. Feet	Approx. Weight / Box
1	500x500 mm	15mm (Approx)	3	8.07sq.ft. (Approx)	24 kgs. (Approx)

DISCLAIMER: Parking Tiles reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime, the colors shown of tiles in this catalogue are purely illustrative and limited to printing process, please refer actual sample before final selection, the details of sizes, colors, references should be verified for typographical errors.

TECHNICAL SPECIFICATION

Sr.No.	Pictogram	Property	International Std.	Tiles Value	Test Method
1		Length & Width	± 0.3%	± 0.03%	ISO-10545-2
2		Thickness	± 5.0%	± 0.40%	ISO-10545-2
3		Straightness Of Sides	± 0.3%	± 0.06%	ISO-10545-2
4		Rectangularity	± 0.3%	± 0.07%	ISO-10545-2
5		Water Absorption %	<3.3%	<1.97%	ISO-10545-3
6		Modulus Of Rupture (MOR)	>27 N/mm ²	30.52 N/mm ²	ISO-10545-4
7		Braking Strength In N	>1100N	3413.28N	ISO-10545-4
8		Surface Abrasion Resistance	Class IV	Class IV	ISO-10545-7
9		Bulk Density , In (g/cc)	>2.2	2.2916 g/cc	ISO-10545-3
10		Frost Resistance	Frostproof	Frostproof	ISO-10545-12
11		Chemical Resistance	No Damage	No Damage	ISO-10545-13
12		Thermal Shock Resistance	No Damage	No Damage	ISO-10545-9
13		Coefficient Of Linear Thermal Expansion	< 9 x 10 ⁻⁶	3.85 x 10 ⁻⁶	ISO-10545-8
14		Staining Resistance	Resistance	Resistance	ISO-10545-14
15		Moisture Expansion mm/m	Nil	Nil	ISO-10545-10
16		Surface Flatness	± 0.4%	± 0.04	ISO-10545-2
17		Surface Quality	> 95%	100%	ISO-10545-2
18		Crazing Resistance	Two Cycle Must Pass	Fully Resistance	ISO-10545-11



www.volarktiles.com