



volark
TILES

**WOODEN CHEVRON
60X120 CM**

CARVING SURFACE



1661

FINISH : MATT CARVING | THICKNESS : 9MM | SIZE : 600X1200MM

- Scratch Resistance
- Frost Resistance
- Stain Resistance
- Dimensional Stability
- Fire Resistance
- Germ Resistance
- Water Resistance
- Chemical Resistance





1662

FINISH : MATT CARVING | THICKNESS : 9MM | SIZE : 600X1200MM

- Scratch Resistance
- Frost Resistance
- Stain Resistance
- Dimensional Stability
- Fire Resistance
- Germ Resistance
- Water Resistance
- Chemical Resistance






1663

FINISH : MATT CARVING | THICKNESS : 9MM | SIZE : 600X1200MM

- Scratch Resistance
- Frost Resistance
- Stain Resistance
- Dimensional Stability
- Fire Resistance
- Germ Resistance
- Water Resistance
- Chemical Resistance



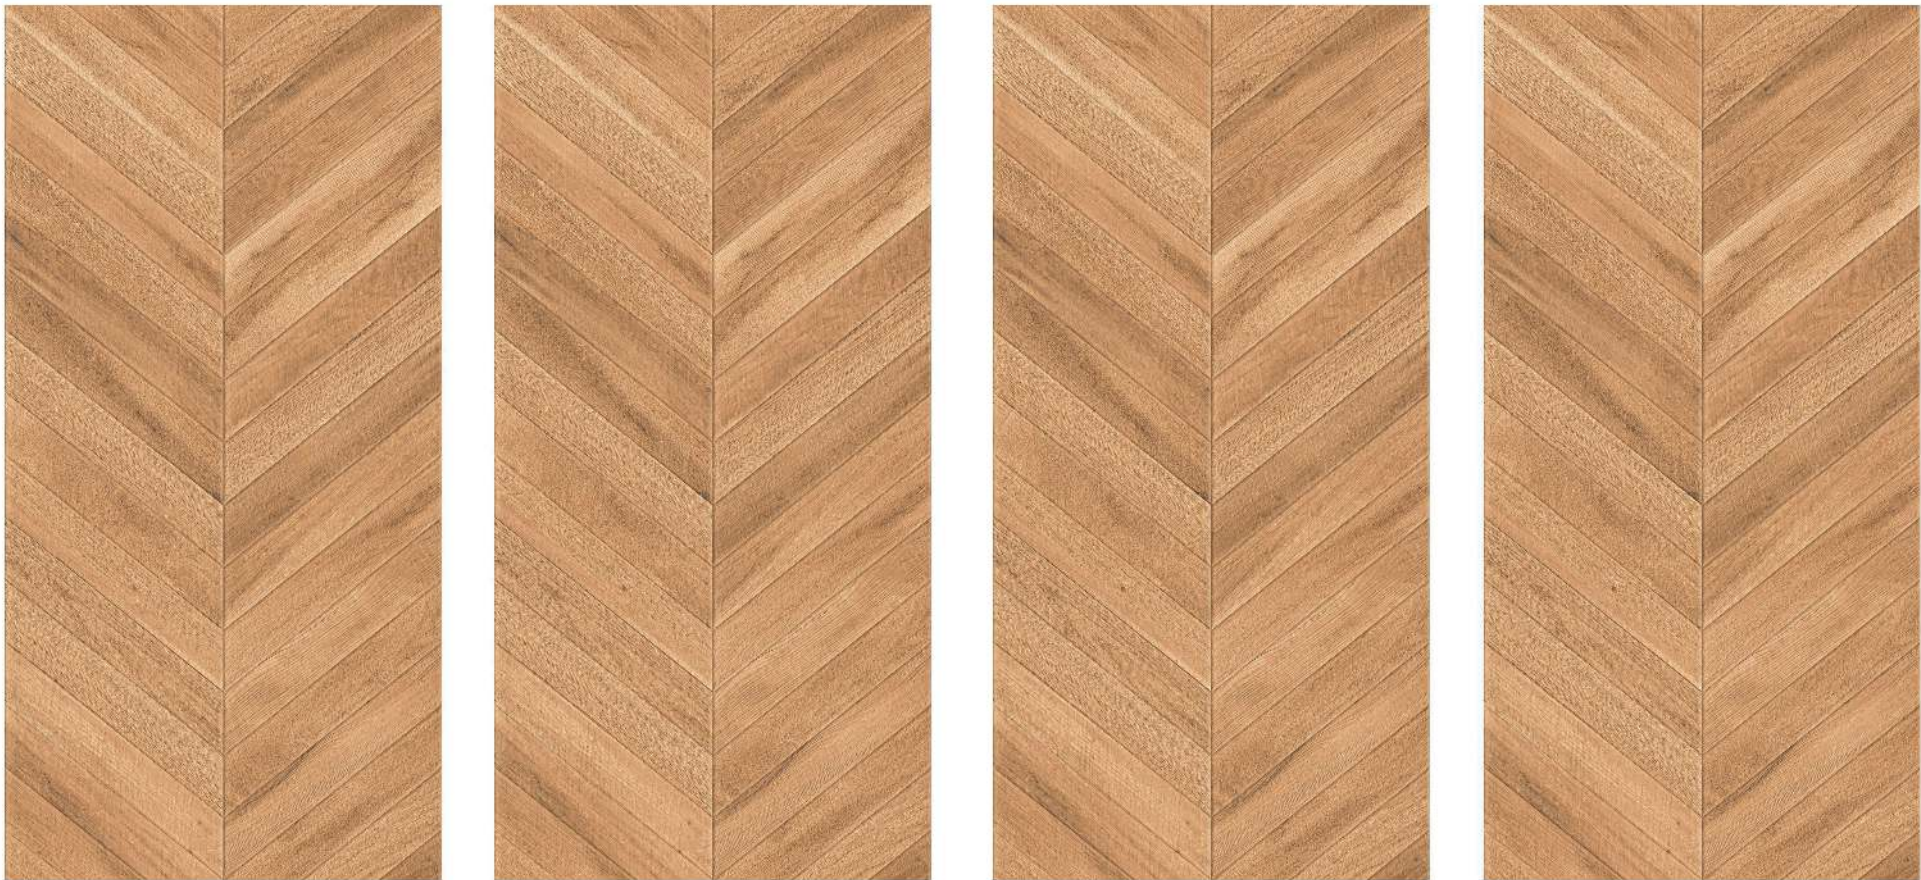

1664

FINISH : MATT CARVING | THICKNESS : 9MM | SIZE : 600X1200MM

- Scratch Resistance
- Frost Resistance
- Stain Resistance
- Dimensional Stability
- Fire Resistance
- Germ Resistance
- Water Resistance
- Chemical Resistance





1665

FINISH : MATT CARVING | THICKNESS : 9MM | SIZE : 600X1200MM

- Scratch Resistance
- Frost Resistance
- Stain Resistance
- Dimensional Stability
- Fire Resistance
- Germ Resistance
- Water Resistance
- Chemical Resistance





1666

FINISH : MATT CARVING | THICKNESS : 9MM | SIZE : 600X1200MM

- Scratch Resistance
- Frost Resistance
- Stain Resistance
- Dimensional Stability
- Fire Resistance
- Germ Resistance
- Water Resistance
- Chemical Resistance





1667

FINISH : MATT CARVING | THICKNESS : 9MM | SIZE : 600X1200MM

- Scratch Resistance
- Frost Resistance
- Stain Resistance
- Dimensional Stability
- Fire Resistance
- Germ Resistance
- Water Resistance
- Chemical Resistance



Sr.No	CHARACTERISTICS	STANDARD AS PER IS 15622:2006 GROUP BIA	MEAN VALUE
Regulatory Properties			
1	Deviation in Length & Width	±0.5%	±0.1%
2	Deviation in Thickness	±5.0%	±3.0%
3	Straightness of Sides	±0.5%	±0.1%
4	Rectrangularity	±0.5%	±0.1%
5	Surface Flatness	±0.5%	±0.2%
6	Glossiness	As per mfg.	Matt surface
Structural Properties			
7	Water Absorption	<0.5%	≤0.10%
8	Apparent Density	>2.0 g/cc	>2.10 g/cc
Massive Mechanical Properties			
9	Modulus Rupture	Min. 35 N/mm ²	Min. 40 N/mm ²
10	Impact Resistance	As per mfg.	Min. 0.55
Surface Mechanical Properties			
11	Surface abrasion resistance	As per mfg.	Min. Class 5
12	MOH's Hardness	As per mfg.	Min. 5
Thermo Hydrometric Properties			
13	Frost Resistance	No Damage	No Damage
14	Thermal Shock Resistance	No Damage	No Damage
15	Moisture Expansion	Nil	Nil
16	Crazing Resistance	No Damage	Min. 10 Cycle
Chemical Properties			
17	Chemical Resistance	No Damage	No Damage
18	Stain Resistance	Resistance	Resistance
Safety Properties			
19	Anti Skid (COF)	As per mfg.	Matt <0.75
20	Fire Resistance	As per mfg.	Fire Proof

PACKING DETAILS

SIZE	THICKNESS	TILES PER BOX	COVERAGE AREA (Approx)
600x1200mm	9 mm (Approx)	2 pcs	1.44 sq.mtr.



www.volarktiles.com