

The background of the advertisement is a photograph of an outdoor patio. The floor is covered with large, rectangular, light-brown tiles in a staggered pattern. In the top left corner, there is a wicker lounge chair and a small round table with a magazine. In the bottom right corner, there is a green plant. The bottom of the image features a dark wooden fence.

volark
TILES

600X600 : 20 mm

Outdoor Tiles

10
YEARS
OF INNOVATION



SIZE
600X600MM



7021





SIZE
600X600MM



7019





SIZE
600X600MM



7020





SIZE
600X600MM



7003





SIZE
600X600MM



7001





SIZE
600X600MM



7017





SIZE
600X600MM



7018





SIZE
600X600MM



7015






SIZE
600X600MM



7002

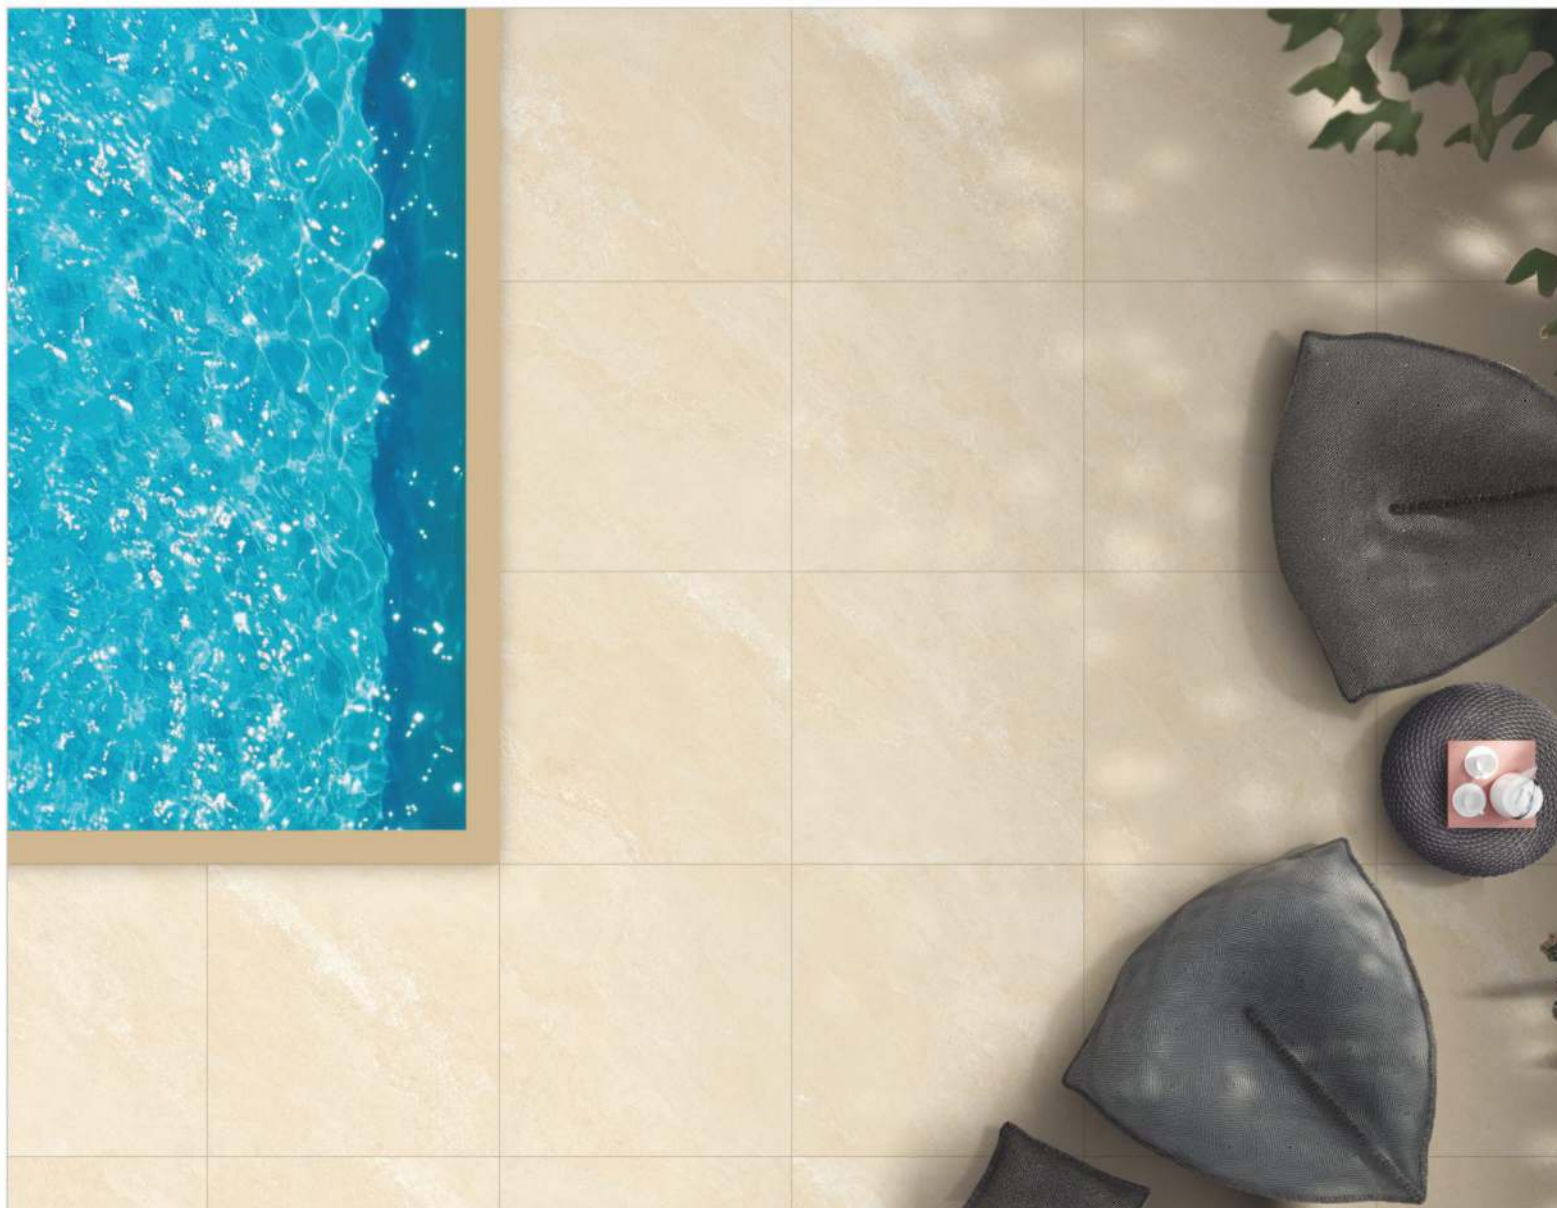



SIZE
600X600MM



7016



Cement Grey

Efficiently
generate
competitive
action



7004

60 x 60 cm



2 cm
Thickness



Cement Grey 60x60cm

Premium 2cm Rectified Porcelain

Fossil Grey

Efficiently
generate
competitive
action



7005

60 x 60 cm



2 cm
Thickness



Fossil Grey 60x60cm

Premium 2cm Rectified Porcelain


Mountain Grey

Efficiently
generate
competitive
action



7003

60 x 60 cm

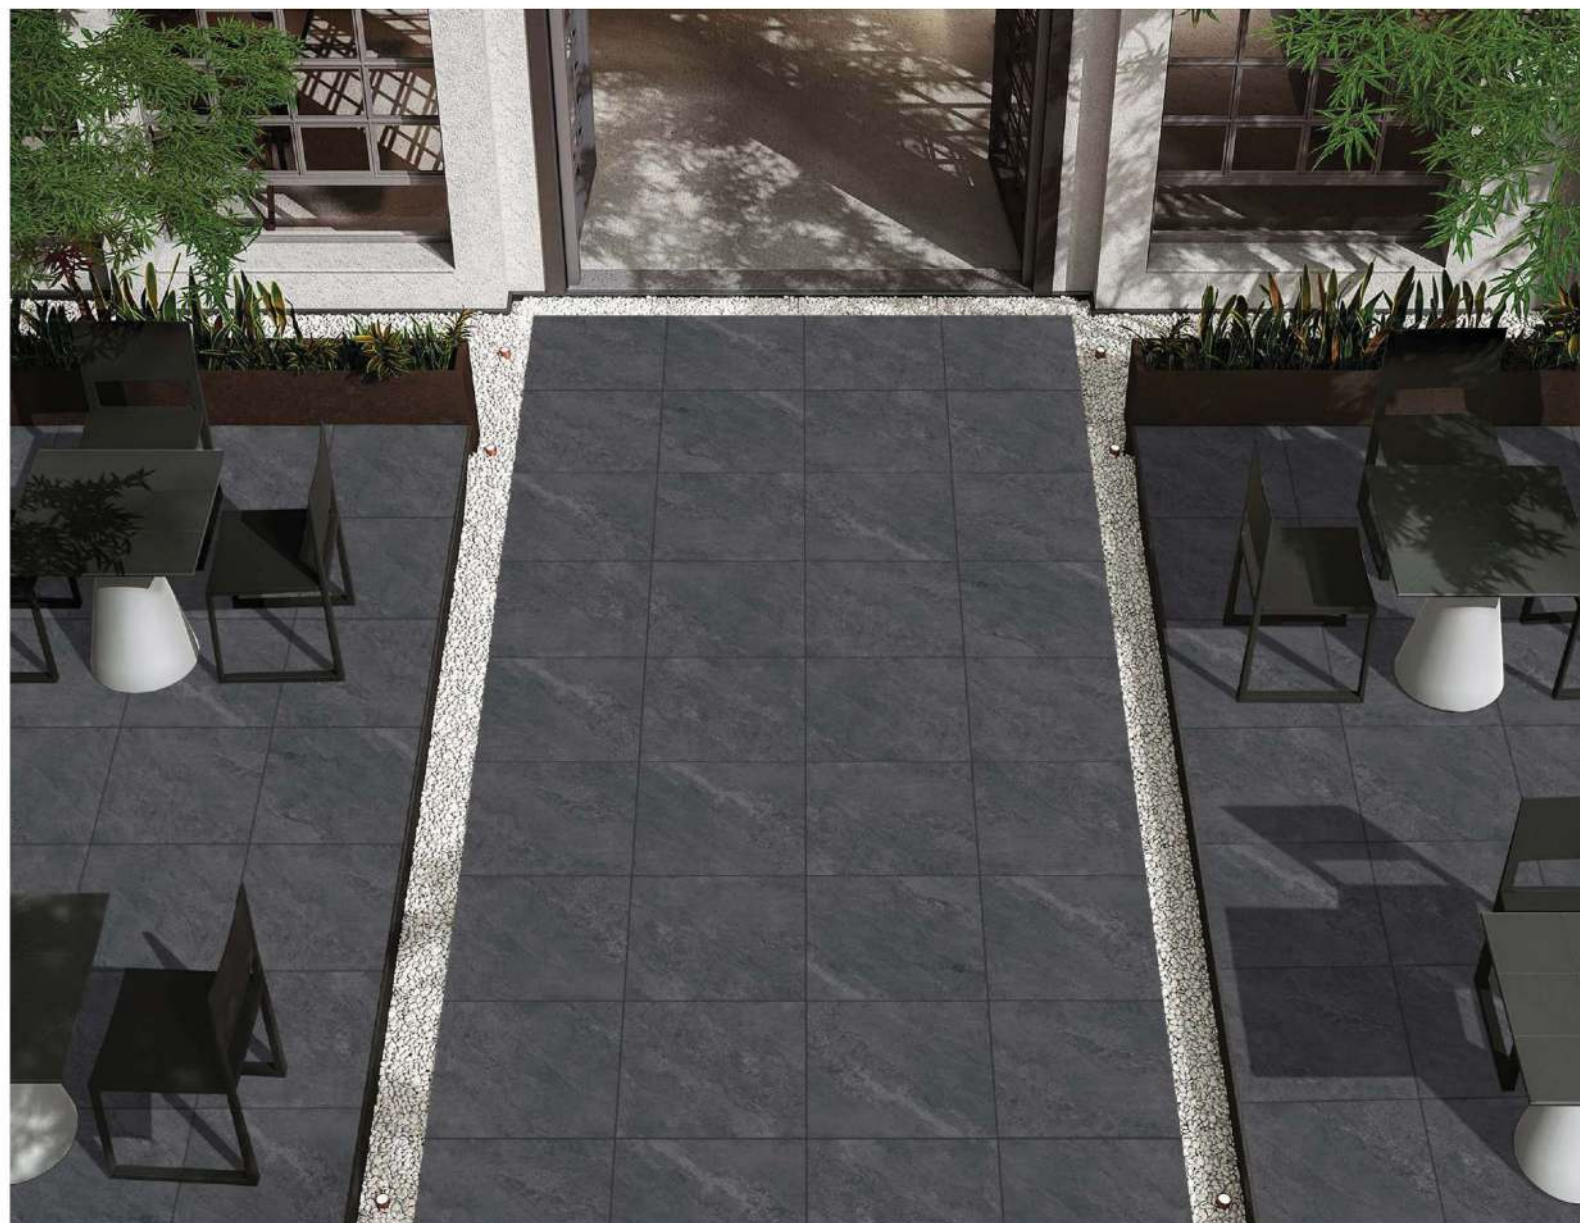

Mountain Grey 60x60cm

Premium 2cm Rectified Porcelain

Efficiently
generate
competitive
action



7010

60 x 60 cm



2 cm
Thickness



Premium 2cm Rectified Porcelain

Cosmic Ivory

Efficiently
generate
competitive
action



7002

60 x 60 cm



2 cm
Thickness



Cosmic Ivory 60x60cm

Premium 2cm Rectified Porcelain

Fossil Crema

Efficiently
generate
competitive
action



7009

60 x 60 cm



2 cm
Thickness



Fossil Crema 60x60cm

Premium 2cm Rectified Porcelain

Efficiently
generate
competitive
action



7011

60 x 60 cm



2 cm
Thickness



Premium 2cm Rectified Porcelain

Mountain White

Efficiently
generate
competitive
action




7001

60 x 60 cm



2 cm
Thickness

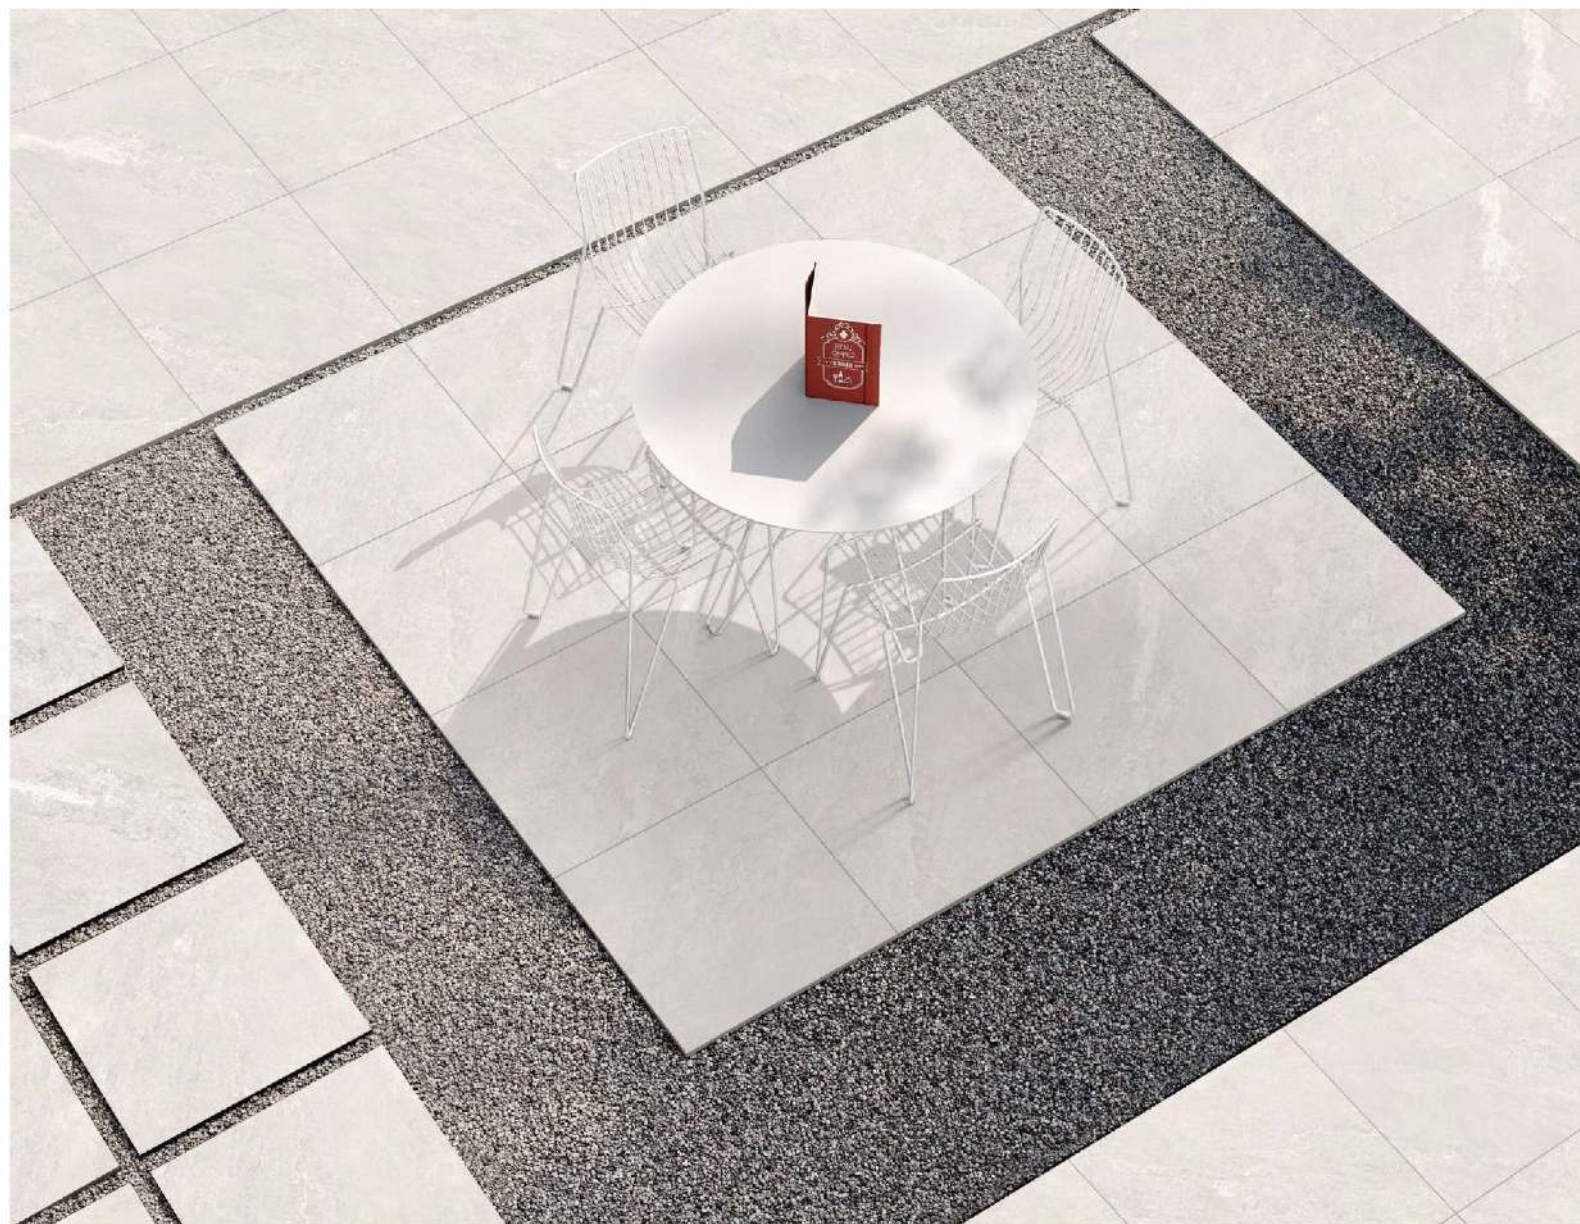

Mountain White 60x60cm

Premium 2cm Rectified Porcelain

Efficiently
generate
competitive
action



7012

60 x 60 cm



2cm
Thickness



Premium 2cm Rectified Porcelain

Efficiently
generate
competitive
action



7013

60 x 60 cm



2 cm
Thickness



Premium 2cm Rectified Porcelain

Efficiently
generate
competitive
action



7014

60 x 60 cm



2cm
Thickness



Premium 2cm Rectified Porcelain


Quartz White

Efficiently
generate
competitive
action



7006

60 x 60 cm

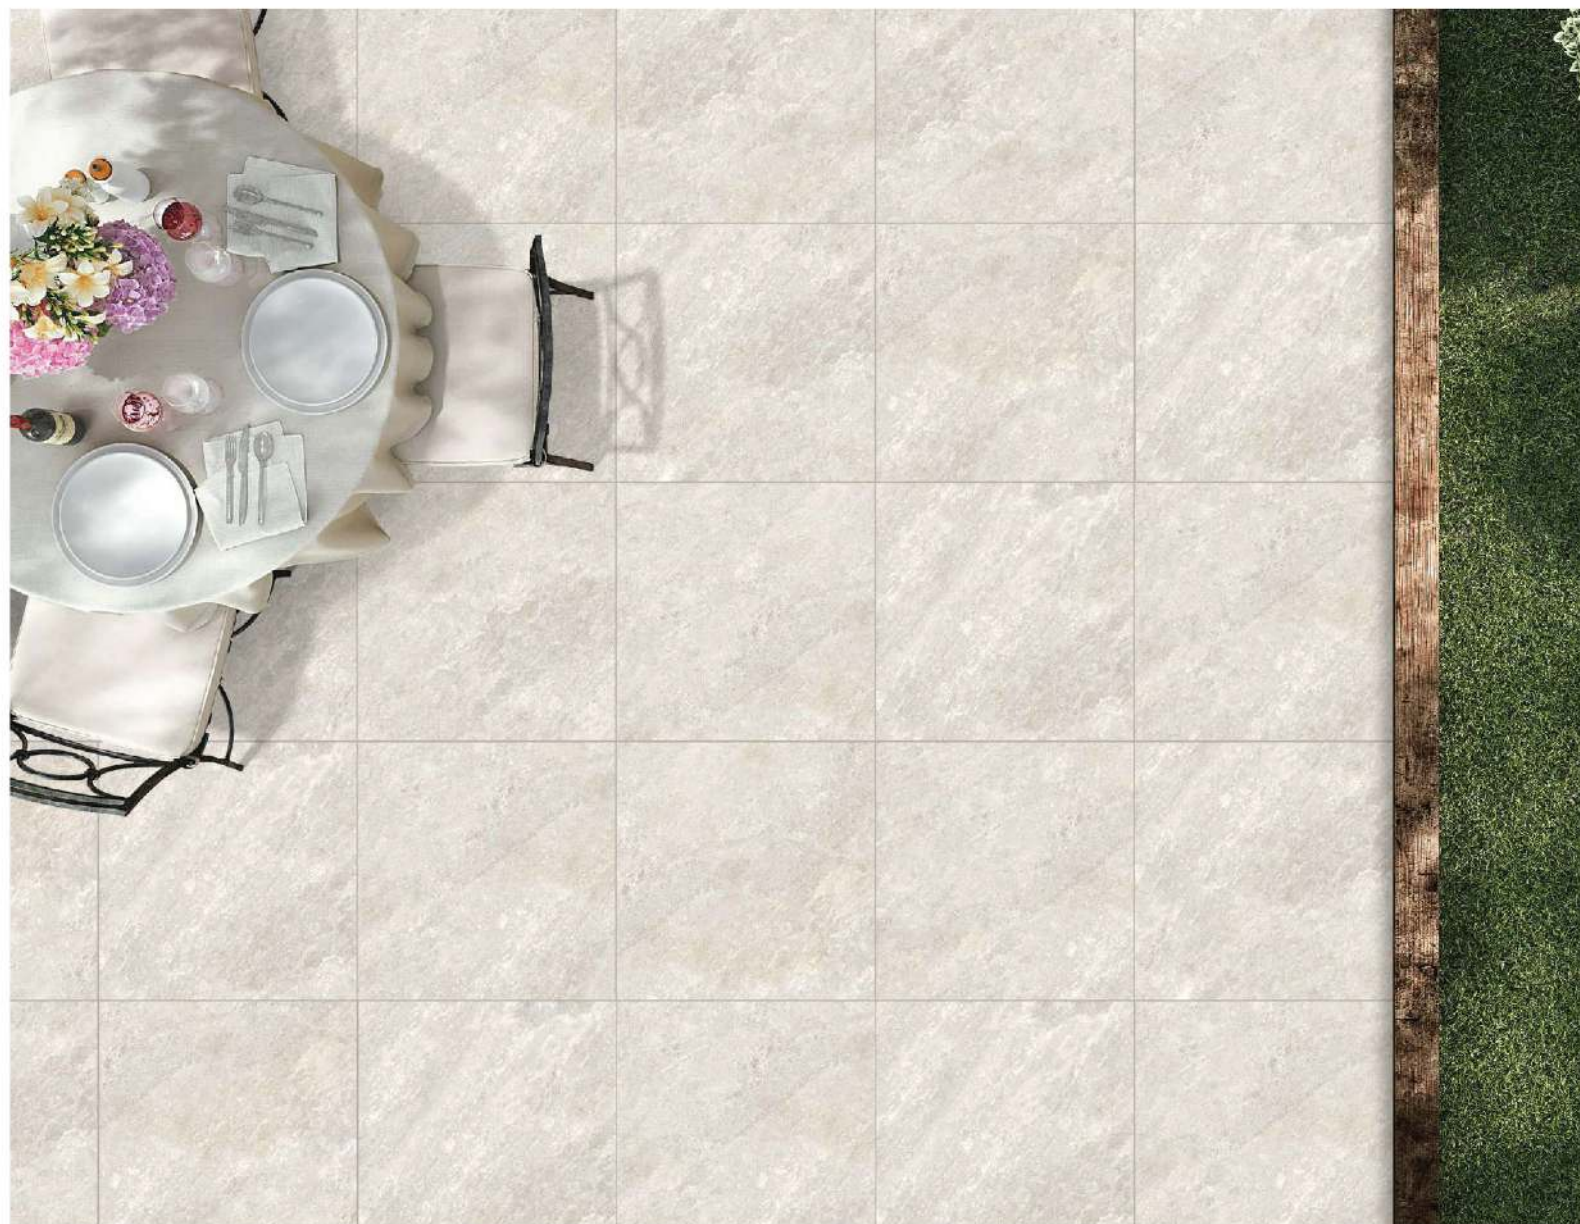

Quartz White 60x60cm

Premium 2cm Rectified Porcelain

Riverside Pearl

Efficiently
generate
competitive
action



7007

60 x 60 cm



Riverside Pearl 60x60cm

Premium 2cm Rectified Porcelain


Quartzite White

Efficiently
generate
competitive
action



7008

60 x 60 cm

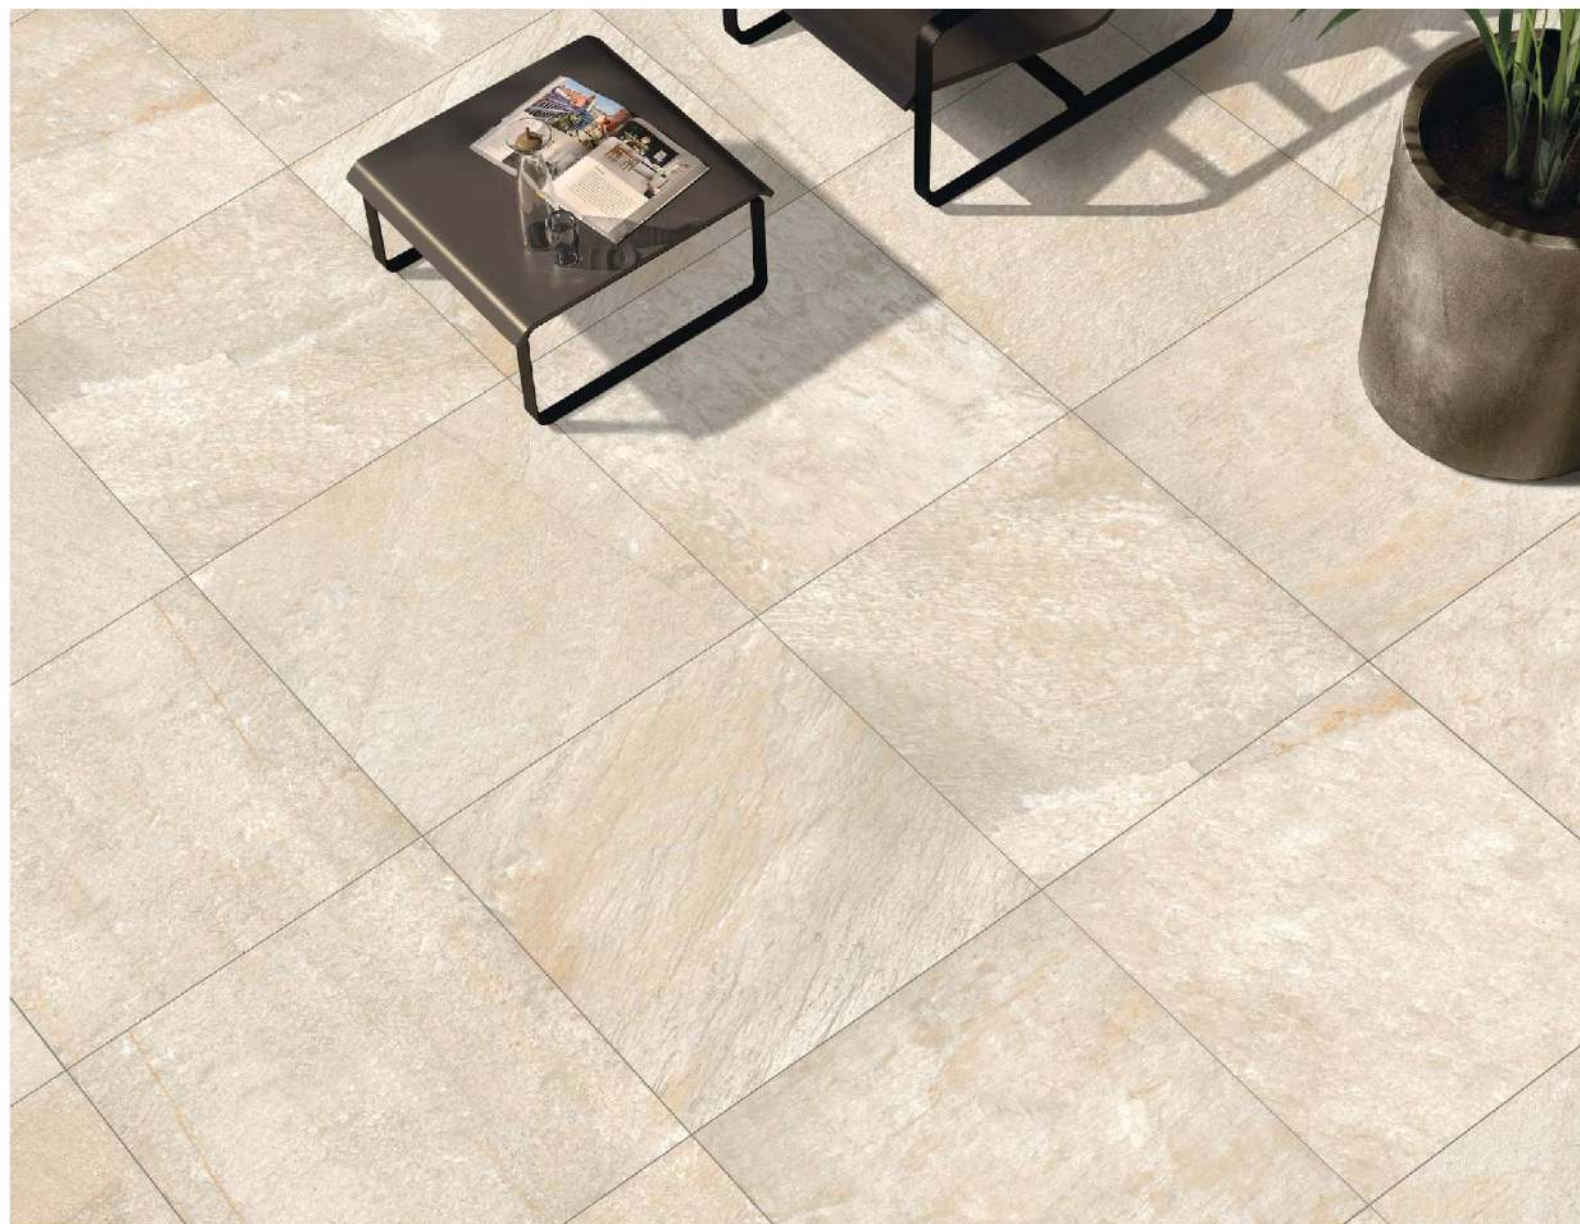

Quartzite White 60x60cm

Premium 2cm Rectified Porcelain

TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO 13006:2018/EN14411 GR.BLA	METHOD OF TESTING	OUR VALUE
----------------	---	-------------------	-----------

Regulatory Properties			
Deviation in length and width	± 0.30 % (± 1.00 mm)	ISO 10545-2	± 0.10 %
Deviation in thickness	± 5.0 % (± 3.50 mm)	ISO 10545-2	± 4.00 %
Straightness in side	± 0.30 % (± 0.80 mm)	ISO 10545-2	± 0.10 %
Rectangularity	± 0.30 % (± 1.50 mm)	ISO 10545-2	± 0.10 %
Surface Flatness Central Curvature	± 0.40 % (± 1.80 mm)	ISO 10545-2	± 0.20 %
Surface Flatness Edge Curvature	± 0.40 % (± 1.80 mm)	ISO 10545-2	± 0.20 %
Surface Flatness warpage	± 0.40 % (± 1.80 mm)	ISO 10545-2	± 0.10 %
Surface Quality	>95% defects free	ISO 10545-2	>95% defects free
Small Color Diffrence (for Plain Color)	E <1.00	ISO 10545-16	E <0.30
Glossiness (Matt)	As per Manufacture	Gloss Meter 60*	3 <Gloss Value <7
Structural Properties			
Water Absorption	≤0.50 %	ISO 10545-3	≤0.060 %
Bulk Density	As per Manufacture	ISO 10545-3	> 2.28 gm/cc
Surface Mechanical Properties			
MOH S.Hardness #	As per Manufacture	BS EN 15771	Polished min4*/SatinPosh & Matt Min 6
Surface Abrasion Resistance #	As per Manufacture	ISO 10545-7	Polished min Class2,Satin & Posh Min class 3,Matt Min Class 4
Deep Abrasion Resistance #	Max 175 mm2	ISO 10545-6	Max 132 mm2
Thermal Hygrometric Properties			
Moisture Expansion	Max 0.06% (0.6 mm/m)	ISO 10545-10	Max 0.02mm/m
Thermal Expansion(COE) at 100°C	As per Manufacture	ISO 10545-8	Max 6.0x10-6
Thermal Shock Resistance	Min10 Cycle	ISO 10545-9	Min 10 Cycle
Impact Resistance(COR) #	Min 0.55	ISO 10545-5	Min 0.55
Frost Resistance	As per Manufacture	ISO 10545-12	Frost Proof
Chemical Properties			
Resistance to Staining Glazed	Min Class 3	ISO 10545-14	Min.Class 4
Resistance to Household Chemicals & Swimming Pool Salts Glazed	Min Class GB	ISO 10545-13	Min Class GA
Safety properties			
Skid Resistance-(DCOF-WET PENDULUM)##	As per Manufacture	BS 7976-2	Glossy po(<12), Satin,Posh ≥P1(12-24) Matt ≥P2(25-34)
Slip Resistance-Satin/Matt(DCOF) (R Value)##	As per Manufacture	DIN 51130	R10 to R12
Fire Resistance	As per Manufacture	N.A	Fire Proff

PACKING DETAILS			
SIZE	THICKNESS	TILES PER BOX	COVERAGE AREA (Approx)
600X600MM	16 MM (Approx)	2 Pcs.	0.72 sq. mt
600X600MM	20 MM (Approx)	2 Pcs.	0.72 sq. mt

