



20 mm

Outdoor Tiles

Mountain White

Efficiently
generate
competitive
action




7001

60 x 60 cm



2 cm
Thickness

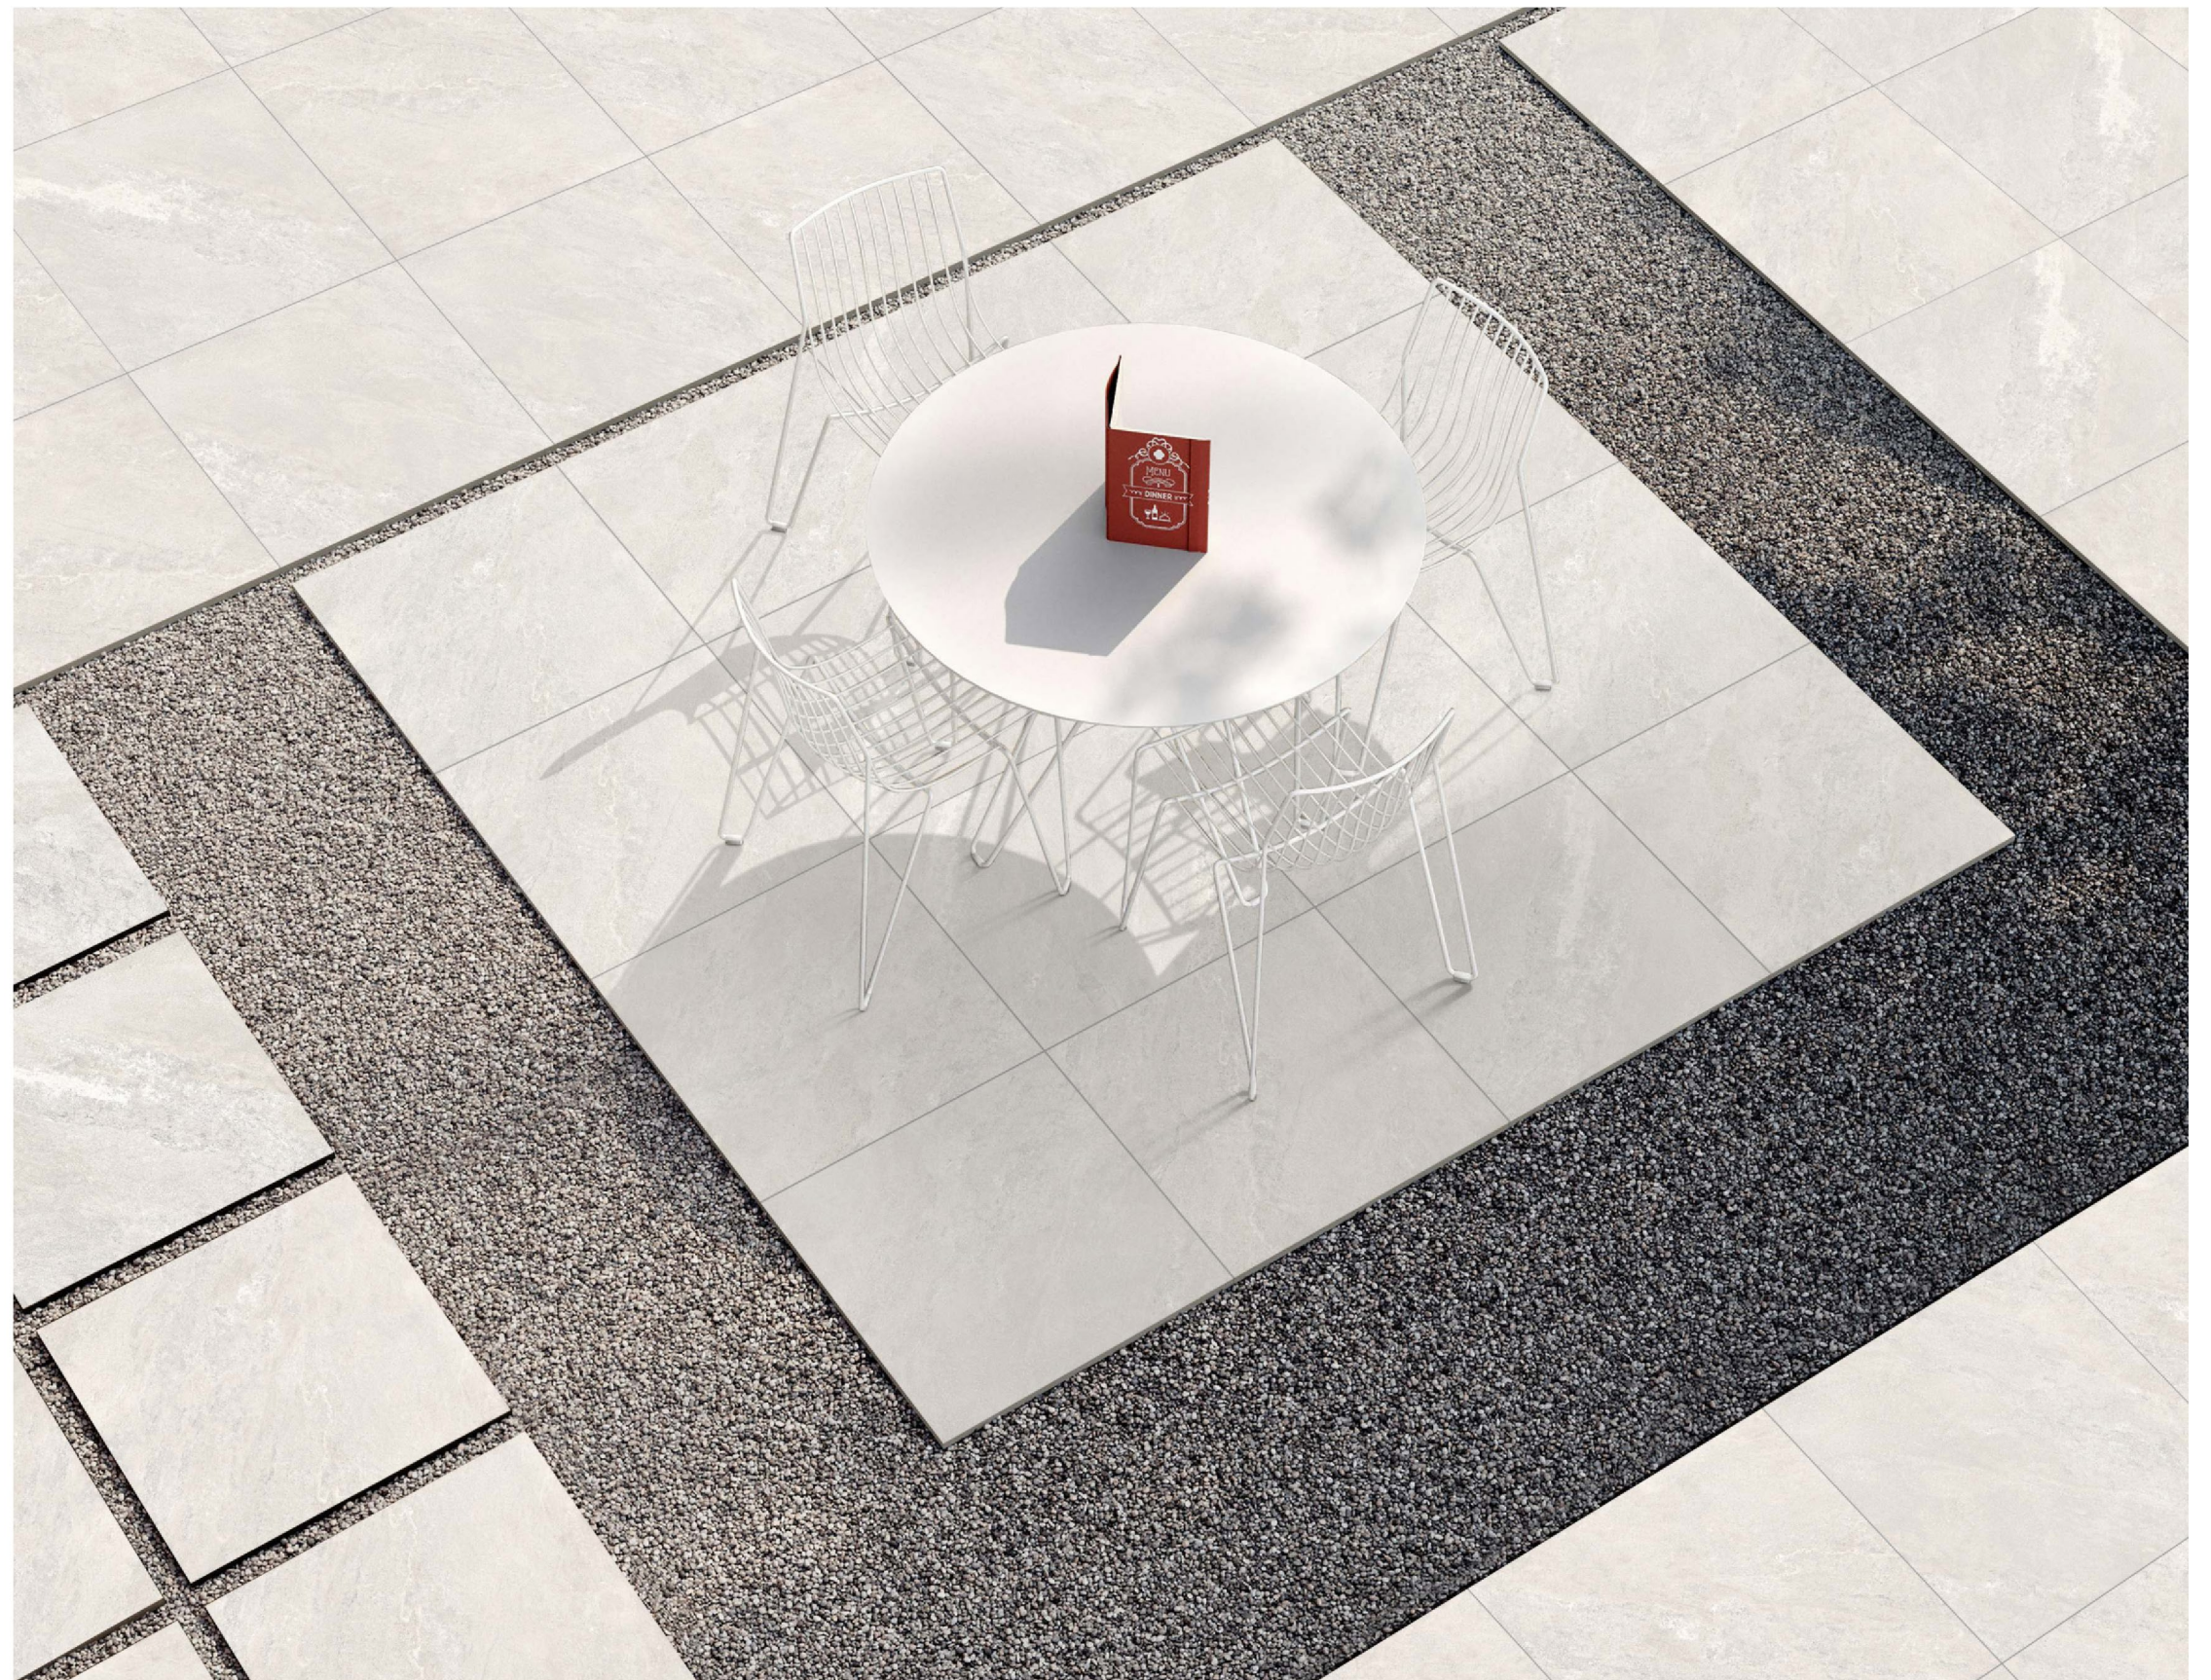

Mountain White 60x60cm

Premium 2cm Rectified Porcelain

Cosmic Ivory

Efficiently
generate
competitive
action



7002

60 x 60 cm



2 cm
Thickness



Cosmic Ivory 60x60cm

Premium 2cm Rectified Porcelain

Mountain Grey


Efficiently
generate
competitive
action

- zircon
Thickness
- R11
Surface
- Full Body
- Anti-slip
- Frost
Proof
- Tonal
Variation
- Low Water
Absorption
- Abrasion
Resistance
- Highly
Durable
- Eco
Friendly



7003

60 x 60 cm

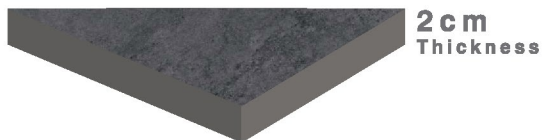

2cm
Thickness



Mountain Grey 60x60cm

Premium 2cm Rectified Porcelain


Cement Grey

Efficiently
generate
competitive
action



7004

60 x 60 cm



2cm
Thickness



Cement Grey 60x60cm

Premium 2cm Rectified Porcelain


Fossil Grey

Efficiently
generate
competitive
action



7005

60 x 60 cm

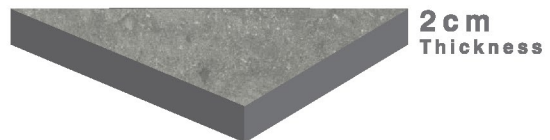

2 cm
Thickness




Fossil Grey 60x60cm

Premium 2cm Rectified Porcelain

Quartz White

Efficiently
generate
competitive
action

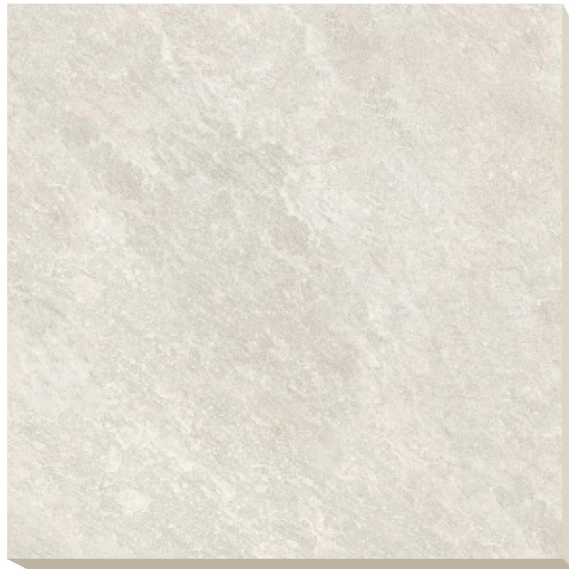

7006

60 x 60 cm



Quartz White 60x60cm

Premium 2cm Rectified Porcelain

Riverside Pearl


Efficiently
generate
competitive
action

- 20mm Thickness
- R11 Surface
- Full Body
- Anti-slip
- Frost Proof
- Tonal Variation
- Low Water Absorption
- Abrasion Resistance
- Highly Durable
- Eco Friendly



7007

60 x 60 cm

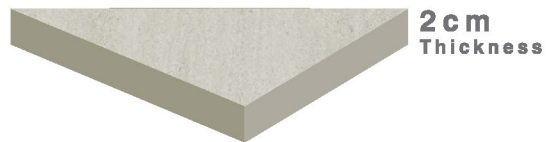

2cm
Thickness



Riverside Pearl 60x60cm

Premium 2cm Rectified Porcelain

Quartzite White

Efficiently
generate
competitive
action



7008

60 x 60 cm



Quartzite White 60x60cm

Premium 2cm Rectified Porcelain

Fossil Crema

Efficiently
generate
competitive
action

- zirconium Thickness
- R11 Surface
- Full Body
- Anti-slip
- Frost Proof
- Tonal Variation
- Low Water Absorption
- Abrasion Resistance
- Highly Durable
- Eco Friendly



7009

60 x 60 cm



2cm
Thickness



Fossil Crema 60x60cm

Premium 2cm Rectified Porcelain


Efficiently
generate
competitive
action

- 20mm Thickness
- R11 Surface
- Full Body
- Anti-slip
- Frost Proof
- Tonal Variation
- Low Water Absorption
- Abrasion Resistance
- Highly Durable
- Eco Friendly



7010

60 x 60 cm

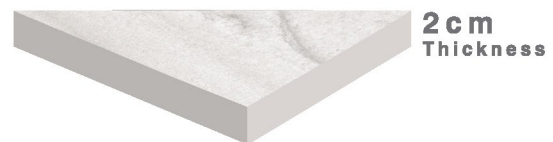

2cm
Thickness



Premium 2cm Rectified Porcelain


Efficiently
generate
competitive
action

- zircon
Thickness
- R11
Surface
- Full Body
- Anti-slip
- Frost
Proof
- Tonal
Variation
- Low Water
Absorption
- Abrasion
Resistance
- Highly
Durable
- Eco
Friendly



7011

60 x 60 cm

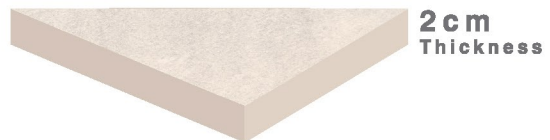

Premium 2cm Rectified Porcelain


Efficiently
generate
competitive
action

- zircon Thickness
- R11 Surface
- Full Body
- Anti-slip
- Frost Proof
- Tonal Variation
- Low Water Absorption
- Abrasion Resistance
- Highly Durable
- Eco Friendly



7012

60 x 60 cm

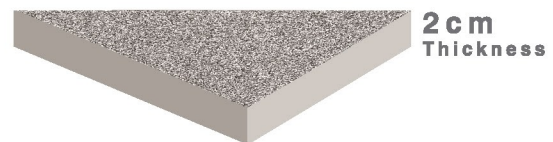

2 cm
Thickness



Premium 2cm Rectified Porcelain

Efficiently
generate
competitive
action

- 20mm Thickness
- R11 Surface
- Full Body
- Anti-slip
- Frost Proof
- Tonal Variation
- Low Water Absorption
- Abrasion Resistance
- Highly Durable
- Eco Friendly



7013

60 x 60 cm



2cm
Thickness



Premium 2cm Rectified Porcelain

Efficiently
generate
competitive
action

- zircon
Thickness
- R11
Surface
- Full Body
- Anti-slip
- Frost
Proof
- Tonal
Variation
- Low Water
Absorption
- Abrasion
Resistance
- Highly
Durable
- Eco
Friendly



7014

60 x 60 cm



2cm
Thickness



Premium 2cm Rectified Porcelain


Efficiently
generate
competitive
action

- zircon Thickness
- R11 Surface
- Full Body
- Anti-slip
- Frost Proof
- Tonal Variation
- Low Water Absorption
- Abrasion Resistance
- Highly Durable
- Eco Friendly



7015

60 x 60 cm

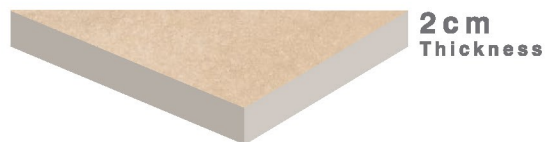

2 cm
Thickness



Premium 2cm Rectified Porcelain


Efficiently
generate
competitive
action

- zirconium Thickness
- R11 Surface
- Full Body
- Anti-slip
- Frost Proof
- Tonal Variation
- Low Water Absorption
- Abrasion Resistance
- Highly Durable
- Eco Friendly



7016

60 x 60 cm

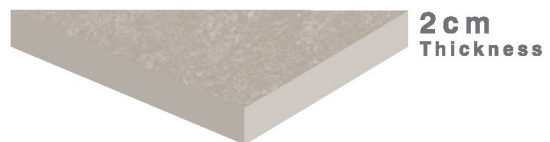

2 cm
Thickness



Premium 2cm Rectified Porcelain

Efficiently
generate
competitive
action

- 20mm Thickness
- R11 Surface
- Full Body
- Anti-slip
- Frost Proof
- Color Variation
- Low Water Absorption
- Abrasion Resistance
- Highly Durable
- Eco Friendly



7017

60x60cm



2cm
Thickness



Premium 2cm Rectified Porcelain

Efficiently
generate
competitive
action

- Zero Thickness
- R11 Surface
- Full Body
- Anti-slip
- Frost Proof
- Tonal Variation
- Low Water Absorption
- Abrasion Resistance
- Highly Durable
- Eco Friendly



7018

60x60 cm



2cm
Thickness



Premium 2cm Rectified Porcelain

Efficiently
generate
competitive
action

- 20mm Thickness
- R11 Surface
- Full Body
- Anti-slip
- Frost Proof
- Tonal Variation
- Low Water Absorption
- Abrasion Resistance
- Highly Durable
- Eco Friendly



7019

60x60 cm



2cm
Thickness



Premium 2cm Rectified Porcelain

Efficiently
generate
competitive
action

- 20mm Thickness
- R11 Surface
- Full Body
- Anti-slip
- Frost Proof
- Tonal Variation
- Low Water Absorption
- Abrasion Resistance
- Highly Durable
- Eco Friendly



7020

60 x 60 cm



2cm
Thickness



Premium 2cm Rectified Porcelain

Efficiently
generate
competitive
action

- 20mm Thickness
- R11 Surface
- Full Body
- Anti-slip
- Frost Proof
- Tonal Variation
- Low Water Absorption
- Abrasion Resistance
- Highly Durable
- Eco Friendly



7021

60 x 60 cm



2cm
Thickness



Premium 2cm Rectified Porcelain


Efficiently
generate
competitive
action

- zircon Thickness
- R11 Surface
- Full Body
- Anti-slip
- Frost Proof
- Tonal Variation
- Low Water Absorption
- Abrasion Resistance
- Highly Durable
- Eco Friendly



MA-552

60 x 60 cm

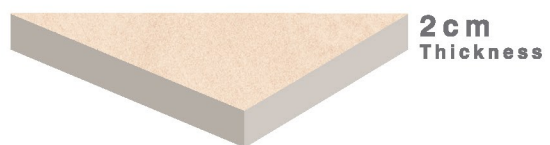

**2cm
Thickness**



Premium 2cm Rectified Porcelain

Efficiently
generate
competitive
action

- zircon
Thickness
- R11
Surface
- Full Body
- Anti-slip
- Frost
Proof
- Tonal
Variation
- Low Water
Absorption
- Abrasion
Resistance
- Highly
Durable
- Eco
Friendly



MA-557

60 x 60 cm



**2cm
Thickness**



Premium 2cm Rectified Porcelain

TECHNICAL SPECIFICATION

TEST DESCRIPTION	STANDARD TEST METHOD	STANDARD REQUIREMENTS	VOLARK SPECIFICATION FOR PRODUCTION
LENGTH	BS EN ISO 10545-2	±0.60%	COMPLIES
WIDTH	BS EN ISO 10545-2	±0.60%	COMPLIES
THICKNESS	BS EN ISO 10545-2	±5.0%	COMPLIES
STRAIGHTNESS OF SIDES	BS EN ISO 10545-2	±0.5%	COMPLIES
RECTANGULARITY	BS EN ISO 10545-2	±0.5%	COMPLIES
SURFACE FLATNESS :CENTARE CURVATURE	BS EN ISO 10545-2	±0.5%	COMPLIES
SURFACE FLATNESS :EDGE CURVATURE	BS EN ISO 10545-2	±0.5%	COMPLIES
SURFACE FLATNESS :WARPAGE	BS EN ISO 10545-2	±0.5%	COMPLIES
WATER ABSORPTION	BS EN ISO 10545-3	E ≤ 0.5%	COMPLIES
BREAKING STRENGTH	BS EN ISO 10545-4	≥ 1300 N	COMPLIES
MODULUS OF RUPTURE	BS EN ISO 10545-4	≥ 35 N/MM ²	COMPLIES
RESISTANCE OF SURFACE ABRASION	BS EN ISO 10545-7	MANUFACTURE TO STATE ABRASION CLASS	PEI P5
COEFFICIENT OF LINER THERMAL EXPANSION	BS EN ISO 10545-8	$9 \times 10^{-6} K^{-1}$ MAX	COMPLIES
RESISTANCE THERMAL SHOCK	BS EN ISO 10545-9	MINI 10 CYCLES	COMPLIES
CRAZING RESISTANCE	BS EN ISO 10545-11	MINI 2 CYCLES AT (750 ±20)Kpa BAR	COMPLIES
RESISTANCE TO HOUSE HOLD CHEMICALS & SWIMMING POOL SLATS	BS EN ISO 10545-13	MINIMUM CLASS GC	COMPLIES
RESISTANCE TO LOW CONCENTRATIONS ACIDS & ALKALIS	BS EN ISO 10545-13	MINIMUM CLASS GLC	CLASS GLB
RESISTANCE TO STAINS	BS EN ISO 10545-14	MINIMUM CLASS 3	COMPLIES
RESISTANCE TO SLIP R -RATING	BS EN ISO 10545-17		R11
PEI	BS EN ISO 10545-17		P5



The logo for Volark Tiles features the brand name 'volark' in a teal, lowercase, sans-serif font. A teal curved line arches over the 'o' and 'l' of 'volark'. Below 'volark', the word 'TILES' is written in a smaller, uppercase, teal, sans-serif font.

PACKING DETAILS

SIZE	THICKNESS	TILES / BOX	COVERAGE AREA / BOX	BOX WEIGHT
600X600 MM	20 MM	2 PCS.	0.72 SQ MTR	31 KG. APPROX