




Express the magnificence
of shades for your quality space

MARBLE TOUCH
next level slab

600X1200MM



HIGH GLOSS FINISH

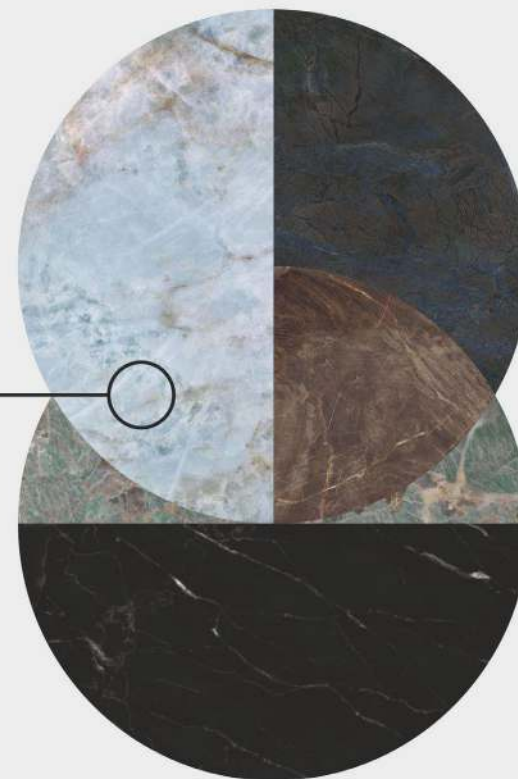

Why Marbletouch ?

THE DURABILITY OF MARBLETOUCH SLABS

makes them perfect for high-traffic areas as they're resistant to scratches and scuffs. Whether in an area of the home that sees high footfall, such as the hallway or kitchen or in a commercial space, porcelain is the most hardwearing.

The refined, exquisite spirit of Marbletouch slabs finds an intriguing new timeless collection of fine floors and coverings. The Marbletouch collection

MARBLETOUCH
next level slab

EASY TO CUT



NATURAL
MARBLE FEEL

ECO FRIENDLY
MATERIAL

volark
TILES

Features



QUALITY RAW
MATERIALS



NO ALTERATION
IN COLOR



VERSATILE FOR
ANY PROJECT



RESISTANT TO
HEAVY LOADS



NON-ABSORBENT



EASY TO CLEAN



RESISTANT TO
LIQUIDS AND ACIDS



RESISTANT TO
SCRATCHES
AND ABRASIONS



RESISTANT TO
THERMAL SHOCK



RESISTANT
TO FROST



NON-TOXIC SLABS
THAT DO NOT RELEASE
MICRO-PARTICLES



SURFACE SUITABLE
FOR CONTACT WITH
FOODSTUFFS



HYGIENIC SURFACE



MARBLE TOUCH
next level slab

CIRCUIT COFEE

Finish | High Gloss
Random | 04 Faces




600X1200M | 24X48"

MARBLE TOUCH
next level slab

BLACK BEAUTY

Finish | High Gloss
Random | 04 Faces


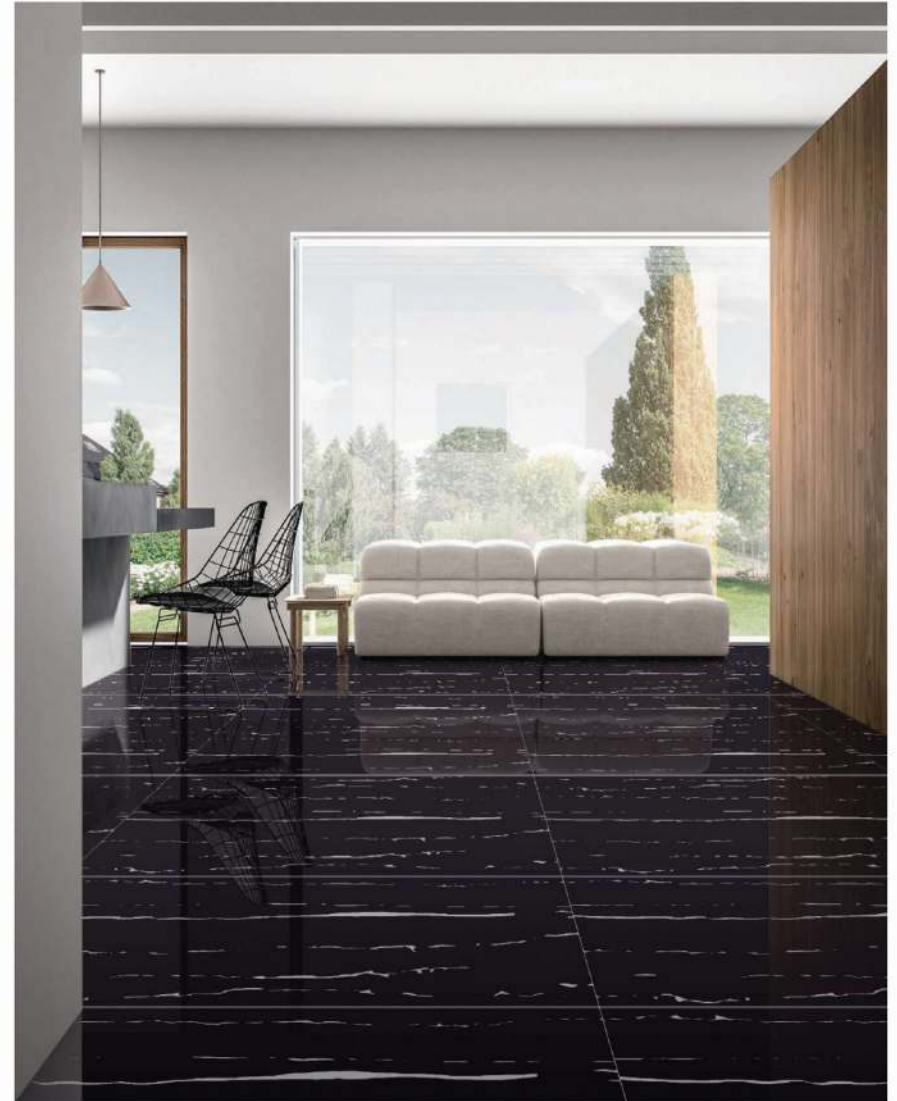




MARBLE TOUCH
next level slab

ASTRUS GOLD

Finish | High Gloss
Random | 04 Faces

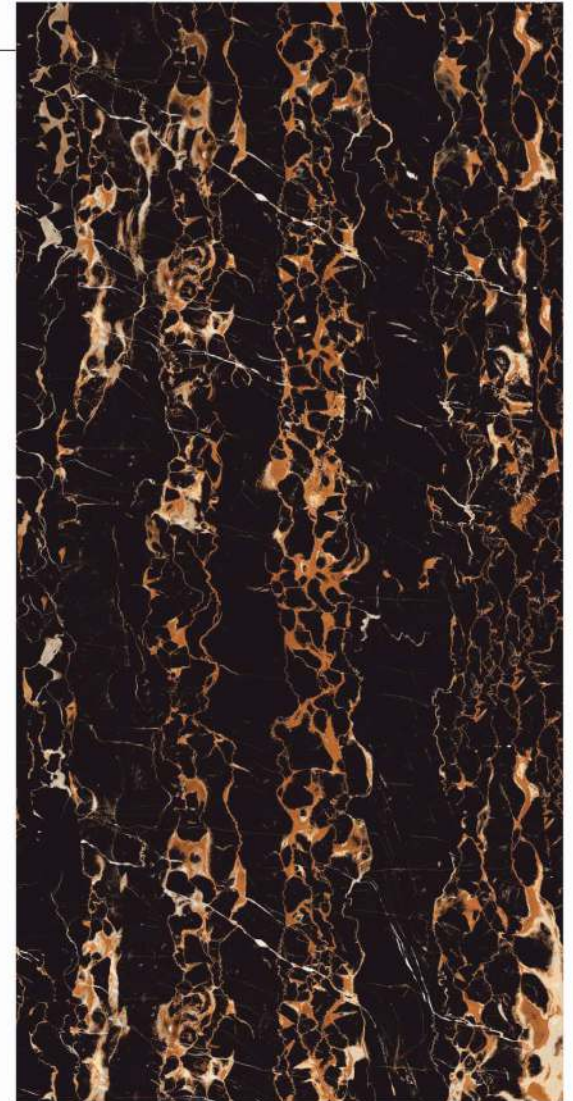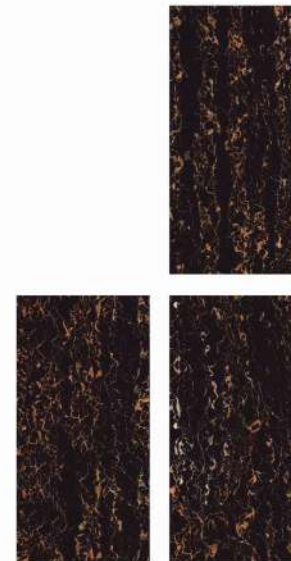

600X1200M | 24X48"

MARBLE TOUCH
next level slab

7045

Finish | High Gloss
Random | 04 Faces






MARBLE TOUCH
next level slab

SAHARA NOIR

Finish | High Gloss
Random | 04 Faces



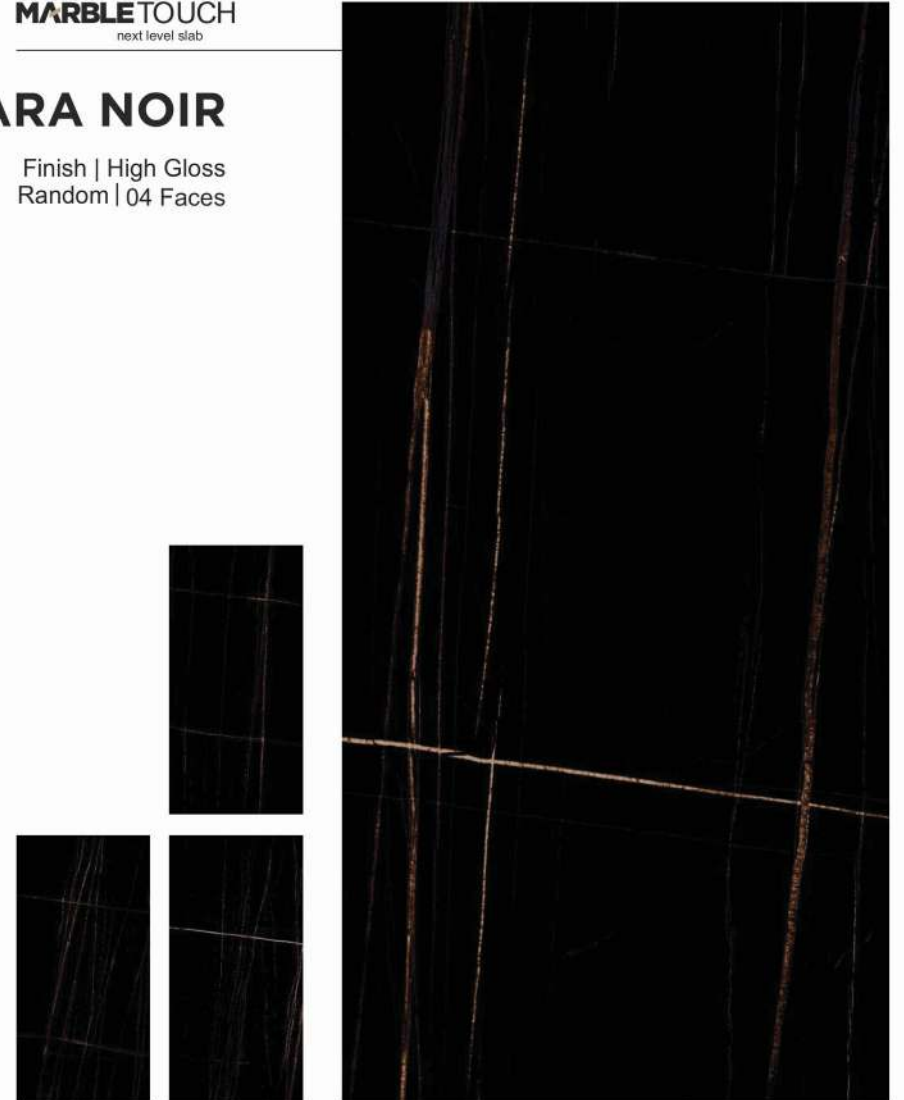


600X1200M | 24X48"

MARBLE TOUCH
next level slab

GOLDEN PORTORO

Finish | High Gloss
Random | 04 Faces

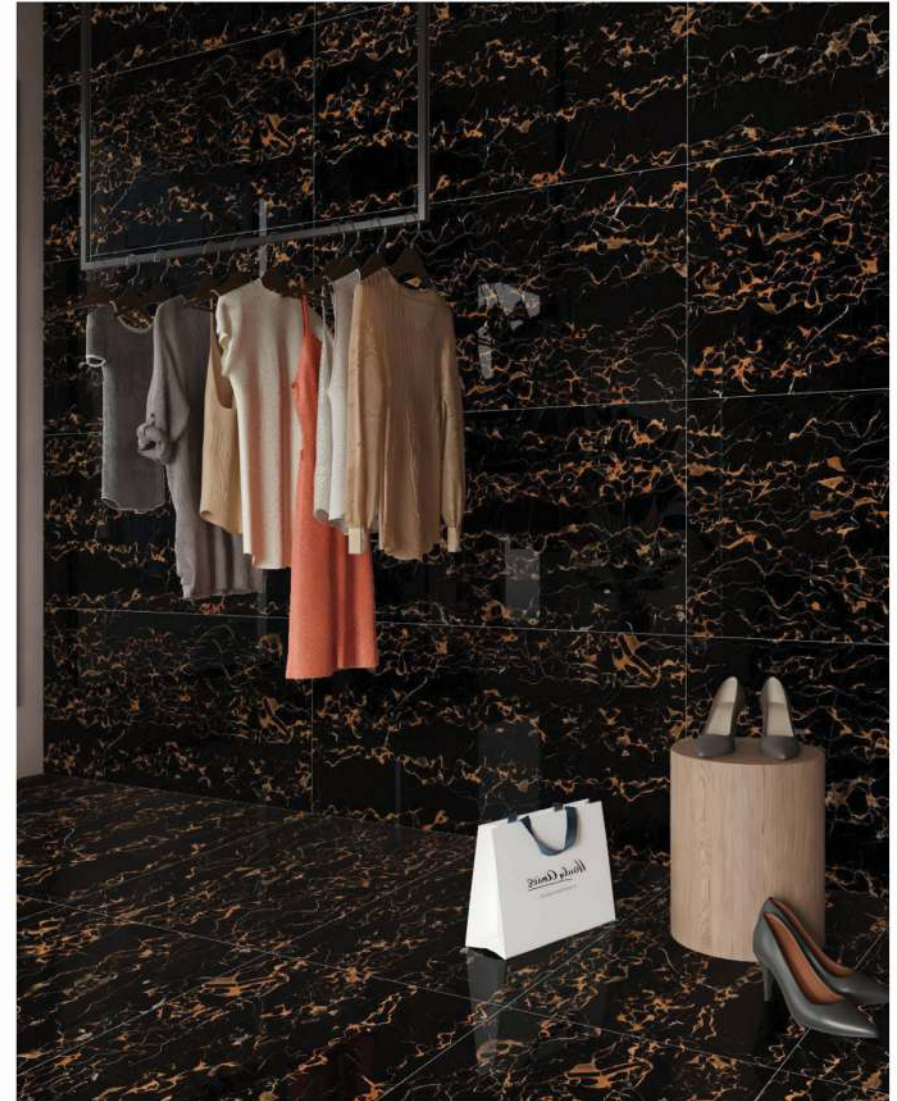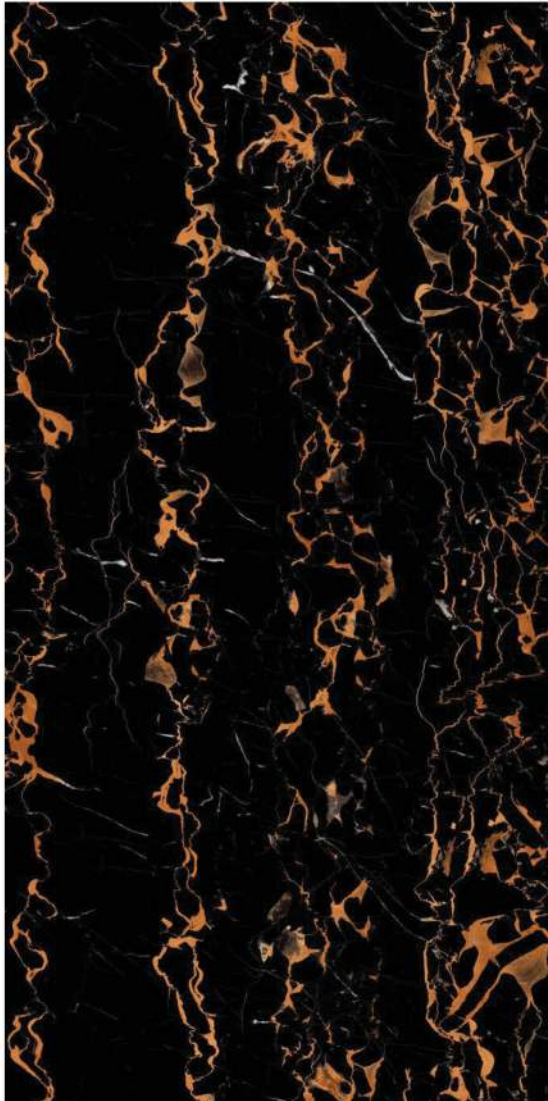




MARBLE TOUCH
next level slab

WHITE BEAUTY

Finish | High Gloss
Random | 04 Faces




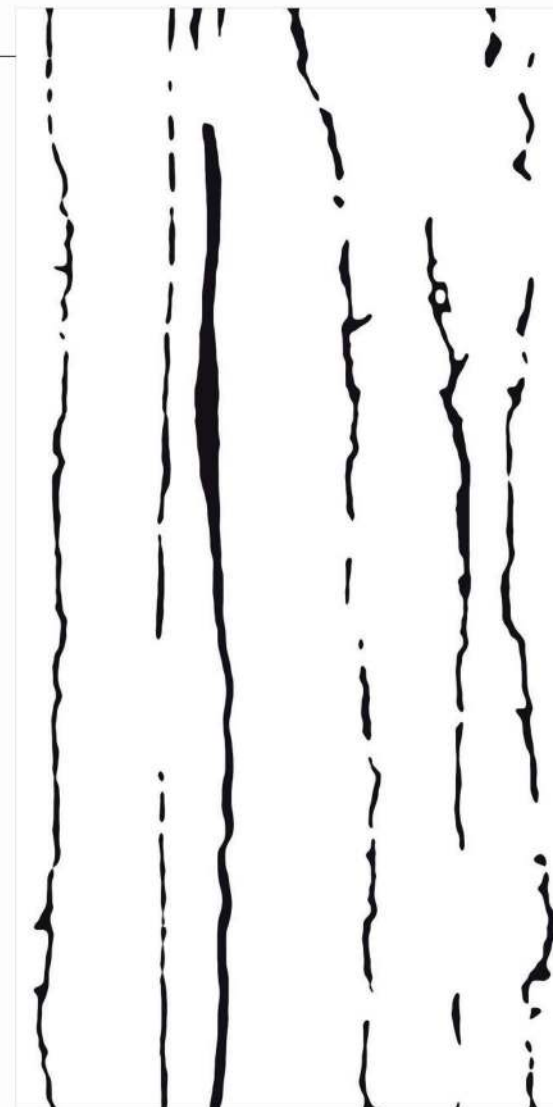


600X1200M | 24X48"

MARBLE TOUCH
next level slab

COSMIC CHOCCO

Finish | High Gloss
Random | 04 Faces

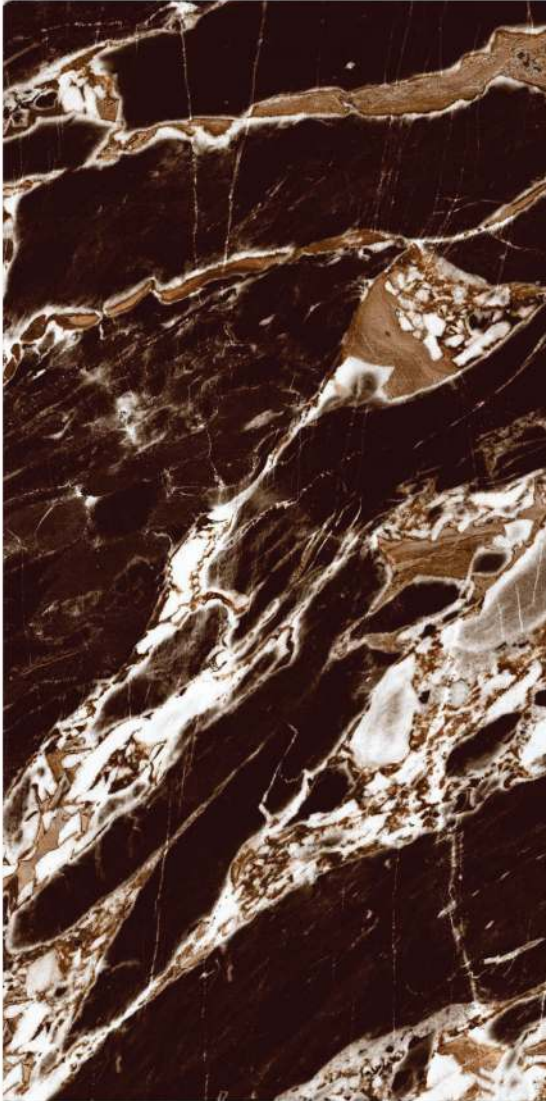




MARBLETOUCH
next level slab

COTILLION SMOKE

Finish | High Gloss
Random | 04 Faces

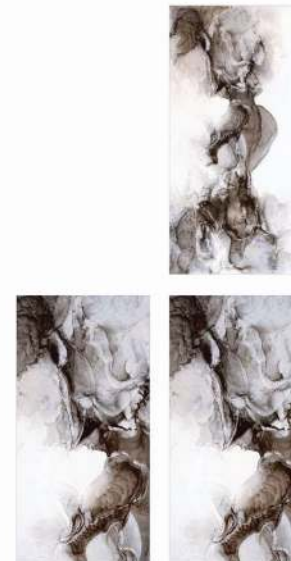

600X1200M | 24X48"

MARBLETOUCH
next level slab

SELVAS BLACK

Finish | High Gloss
Random | 04 Faces



600X1200M | 24X48"

MARBLE TOUCH
next level slab

FUSION BLACK

Finish | High Gloss
Random | 04 Faces



SPECIFICATION OF FULL BODY VITRIFIED TILES

Sr.No	CHARACTERISTICS	STANDARD AS PER IS 15622:2006 GROUP BIA	MEAN VALUE
Regulatory Properties			
1	Deviation in Length & Width	±0.5%	±0.1%
2	Deviation in Thickness	±5.0%	±3.0%
3	Straightness of Sides	±0.5%	±0.1%
4	Rectrangularity	±0.5%	±0.1%
5	Surface Flatness	±0.5%	±0.2%
6	Glossiness	As per mfg.	Matt surface
Structural Properties			
7	Water Absorption	<0.5%	≤0.10%
8	Apparent Density	>2.0 g/cc	>2.10 g/cc
Massive Mechanical Properties			
9	Modulus Rupture	Min. 35 N/mm ²	Min. 40 N/mm ²
10	Impact Resistance	As per mfg.	Min. 0.55
Surface Mechanical Properties			
11	Surface abrasion resistance	As per mfg.	Min. Class 5
12	MOH's Hardness	As per mfg.	Min. 5
Thermo Hydrometric Properties			
13	Frost Resistance	No Damage	No Damage
14	Thermal Shock Resistance	No Damage	No Damage
15	Moisture Expansion	Nil	Nil
16	Crazing Resistance	No Damage	Min. 10 Cycle
Chemical Properties			
17	Chemical Resistance	No Damage	No Damage
18	Stain Resistance	Resistance	Resistance
Safety Properties			
19	Anti Skid (COF)	As per mfg.	Matt <0.75
20	Fire Resistance	As per mfg.	Fire Proof

PACKING DETAILS

SIZE	THICKNESS	TILES PER BOX	COVERAGE AREA (Approx)
600x1200mm	9 mm (Approx)	2 pcs	1.44 sq.mtr.


ONYX 1



Size: **600x1200mm**
Finish: **Glossy**

volark
TILES

Onyx 1

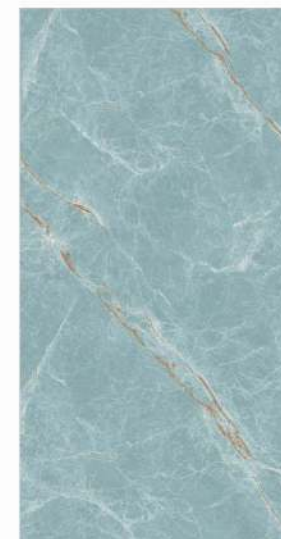

Random: 3

ONYX 2



Size: **600x1200mm**
Finish: **Glossy**

volark
TILES

Onyx 2



Random: 3

ONYX 3



Size: **600x1200mm**
Finish: **Glossy**

volark
TILES

Onyx 3



Random: 3

ONYX 4



Size: **600x1200mm**
Finish: **Glossy**

volark
TILES

Onyx 4



Random: 5

ONYX 5



Size: **600x1200mm**
Finish: **Glossy**

volark
TILES

Onyx 5



Random: 5

ONYX 6



Size: **600x1200mm**
Finish: **Glossy**

volark
TILES

Onyx 6



Random: 5

ONYX 7



Size: **600x1200mm**
Finish: **Glossy**

volark
TILES

Onyx 7



Random: 5

ONYX 8



Size: **600x1200mm**
Finish: **Glossy**

volark
TILES

Onyx 8



Random: 4

ONYX 9



Size: **600x1200mm**
Finish: **Glossy**

volark
TILES

Onyx 9



Random: 4

**TECHNICAL
SPECIFICATION**

Property	International Std ISO13006 : 2012 Group B1a	VOLARK TILES PGVT & GVT	Method of Testing
REGULATORY PROPERTIES			
Deviation in length & width	± 0.05%	± 0.10 %	ISO -10545-2
Deviation in thickness	± 5.00%	± 4.00 %	ISO - 10545-2
Straightness of sides	± 0.50%	± 0.06 %	ISO - 10545-2
Rectangularity	±0.50%	± 0.05 %	ISO - 10545-2
Surface flatness	±0.50%	± 0.10 %	ISO - 10545-2
Color difference	Unaltered	No change	ISO - 10545-16
Glossiness	As per mfg	Min 90	GLOSSOMETER
STRUCTURAL PROPERTIES			
Water Absorption	< 0.50 %	< 0.10 %	ISO -10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES			
Modulus of rupture	Min. 35 N/mm2	Min. 40 N/mm2	ISO - 10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	ISO - 10545-4
Impact Resistance	As per mfg	Min. 055	ISO - 10545-5
SURFACE MECHANICAL PROPERTIES			
Surface Abrasion Resistance	As per mfg	Min. Class-3	ISO - 10545-7
MOH's Hardness	As per mfg	Min. 4	EN 101
THERMO HYGROMETRIC PROPERTIES			
Frost resistance	No damage	No damage	ISO -10545-12
MOH's Hardness	No damage	No damage	ISO - 10545-9
Moisture expansion	Nil	Nil	ISO - 10545-10
Thermal expansion (COE)	Max. 9.0 X 10.6	Max. 6.5 X 10	ISO - 10545-8
Crazing resistance	As per mfg	Min. 10 Cycle	ISO -10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO -10545-13
Satin resistance	Resistan	Resistant	ISO - 10545-11
SAFETY PROPERTIES			
Slip resistance	As per mfg	> 0.40	ISO - 10545-13
Fire resistance	As per mfg	Fireproof	N.A.
Lead & Cadmium given off by glazed tiles	As per mfg	Dous not yield Pb & Cd	ISO -10545-15

Note: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.



**PACKING
DETAILS**

Product	Size	Thiokness (approx)	No. Of Tiles Per Box	Coverage Area
PGVT	600x1200mm	9.00mm	2 Pos.	1.44 Sq. mtr.