



INTENSIFY POISE



**300X450 MM
MATT & GLOSSY**

www.volarktiles.com



LT



KT-1



LT

300x450



LT



HL-1



LT

300x450



LT




KT-1



LT


300x450

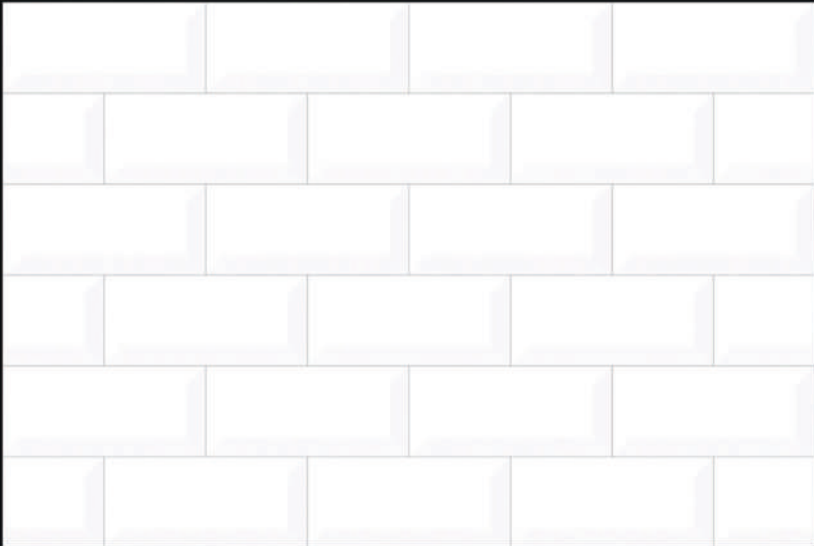

KT-1



KT-1

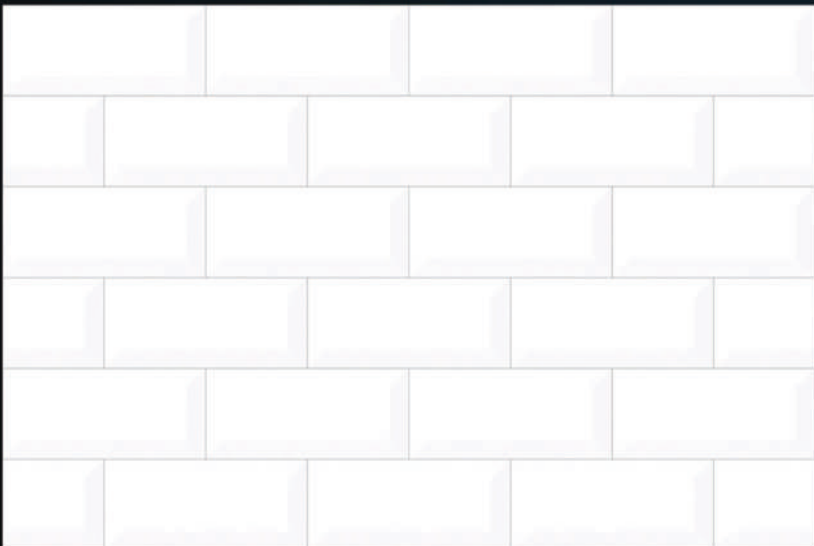


LT


300x450



LT

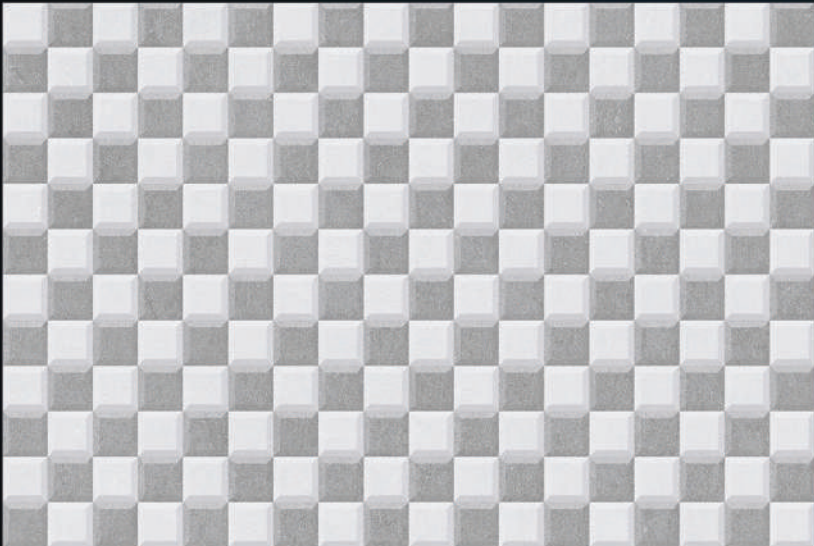

HL-1

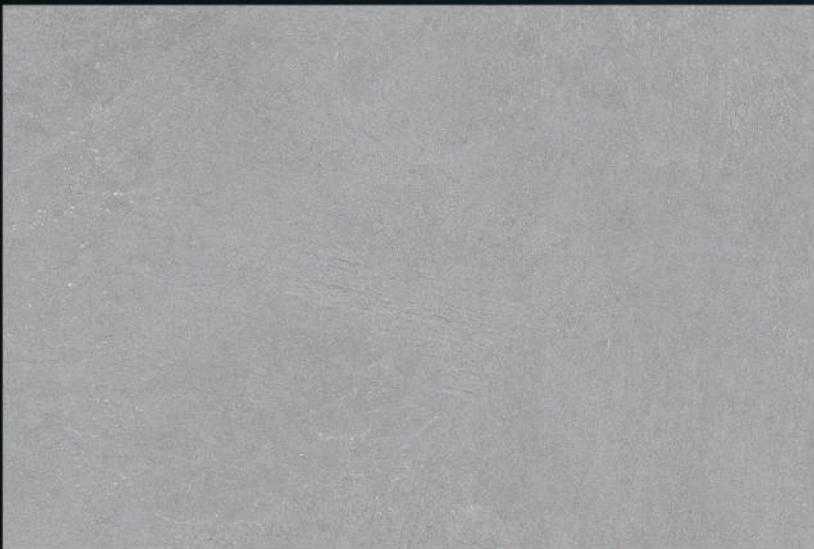

DK

300x450



LT



HL-1




LT


300x450



LT

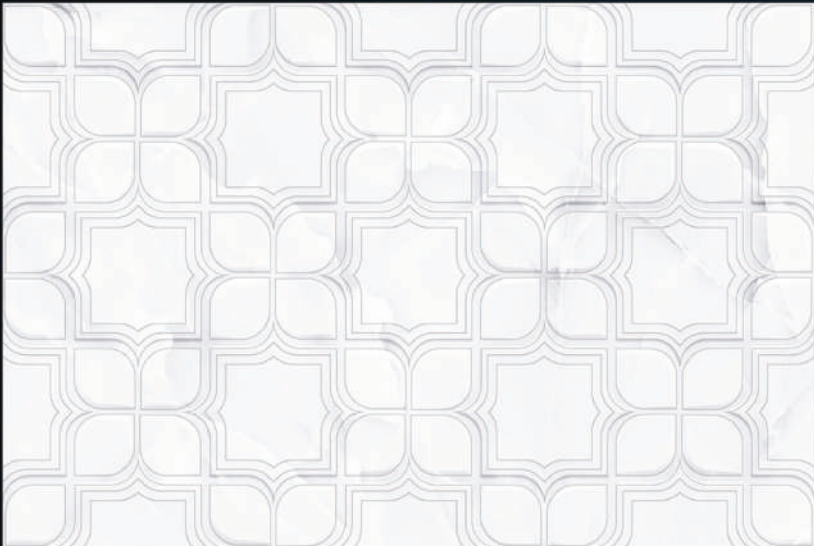

HL-1

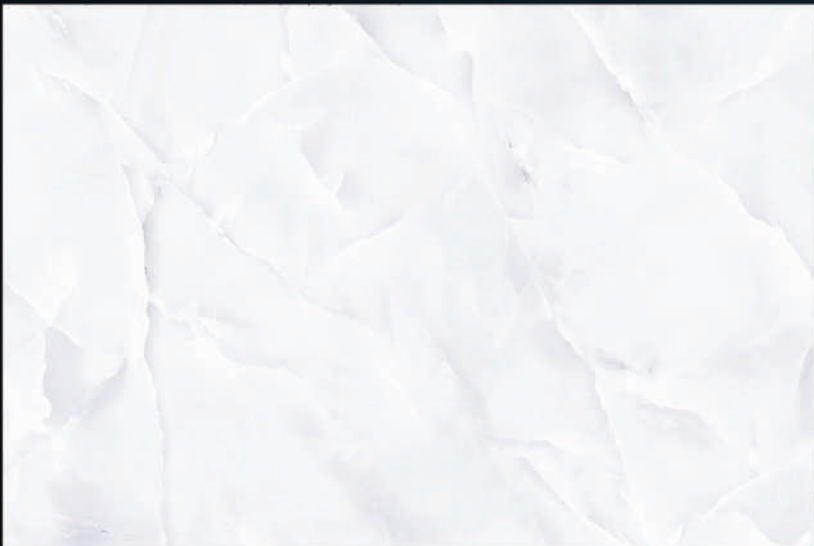

LT

300x450



LT



HL-1



LT

300x450



KT-1



HL-1



LT

300x450



KT-1



KT-1



LT

300x450



LT



HL-1




LT

300x450



LT

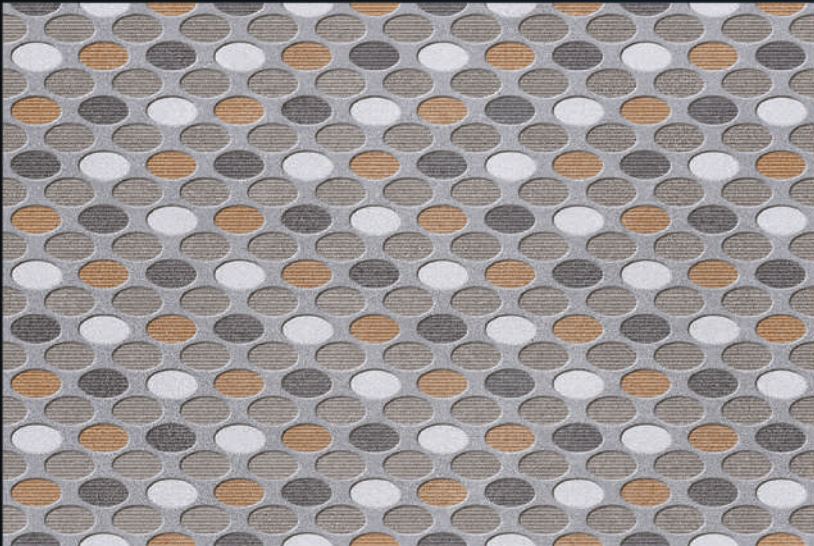

HL-1



DK

300x450



LT



HL-1



LT

300x450



LT



HL-1




LT

300x450

Matching Floor Available 300x300 mm

100%
WATER
PROOF



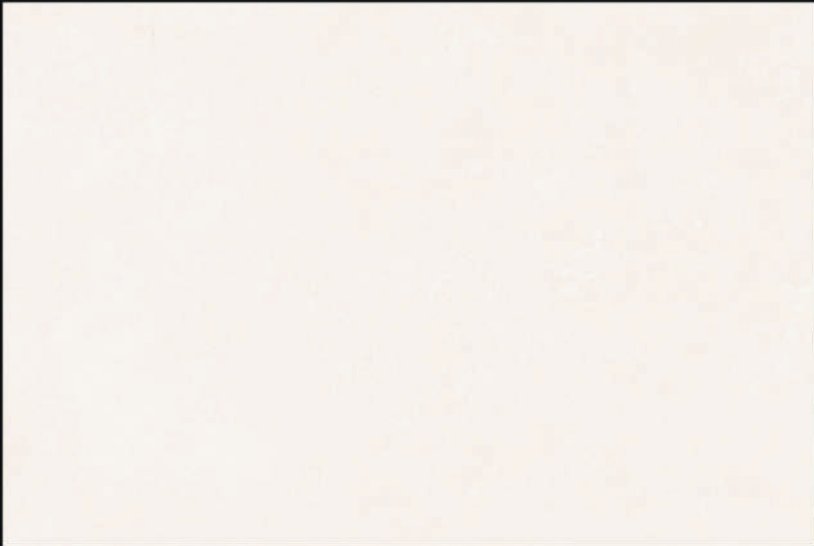

LT



HL-1



DK

300x450

CHARACTERISTICS	EUROSTANDARDS EN-159/IS13753	ASIAGRIS / DGF VALUE		
1. Dimension & Surface Quality	0.5%	0.4%		
2. Deviation in Thickness	0.6MM	0.5MM		
3. Straightness of Sides	0.3%	0.2%		
4. Rectangularity	0.5%	0.3%		
5. Surface Flatness	0.5%	0.5%		
6. Surface Quality	Min. 95%	Min. 96%		
PHYSICAL PROPERTIES				
1. Water Absorption	> 10%	12 -15%		
2. Bending Strength	> 150 Kg./Cm	150-180 Kg/Cm		
3. Scratch Hardness (mohs scale)	Min 3	Min 3		
4. crazing Resistance	1 Cycle	No Crazing Upto 4 cycles		
5. Relevent Group	B III	B III		
6. Type of Tiles	-	Dust Press Wall Tiles		
CHEMICAL PROPERTIES				
1. Staining Resistance	Min Class 2	Resistent To all Acids and Allkalies & Household Chemicals except Hydro Flouric Acid		
2. Household Chemical	Min Class B			
THERMAL PROPERTIES				
1. Thermal Shock Resistance	Resistant 10 Cycles	CONFORMS		
2. Thermal Expansion	Max 9E-06	CONFORMS		
Packing Details				
Dimension in mm.	Thickness in mm.	Tiles per Box (Pcs)	Area Coverage per box (Sq. Mtr.)	Area Weight per box (Kg.) Approx
300x600	9.00 (Approx)	5	0.90	14.000
300x450	8.00 (Approx)	6	0.81	10.500
300x300	8.00 (Approx)	8	0.72	9.000
NOTE : Certain amount of size and shade variation is inherent in all ceramic products • Our conformity to the above standards is applicable only for Premium Quality. • Colours shown are as accurate as the limitations of the prints process will allow. • Prospective customers are advised to inspect a sample of the tile before ordering. • Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specification without prior notice. • Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggested to check the tiles before purchase and laying as the company does not accept responsibility once the tiles are laid.				

