





COCCI SICILIANI





Random: 6

Size : 600x1200mm

Shape touch.







DOM NUT





Random: 6

Size : 600x1200mm

Shape touch.









REVERSO







Random: 6

Size : 600x1200mm

Shape touch pro

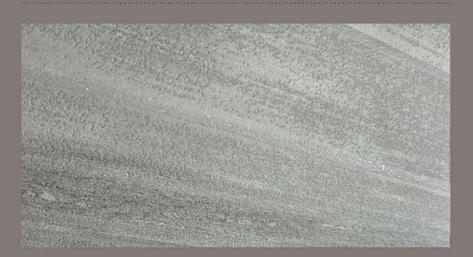



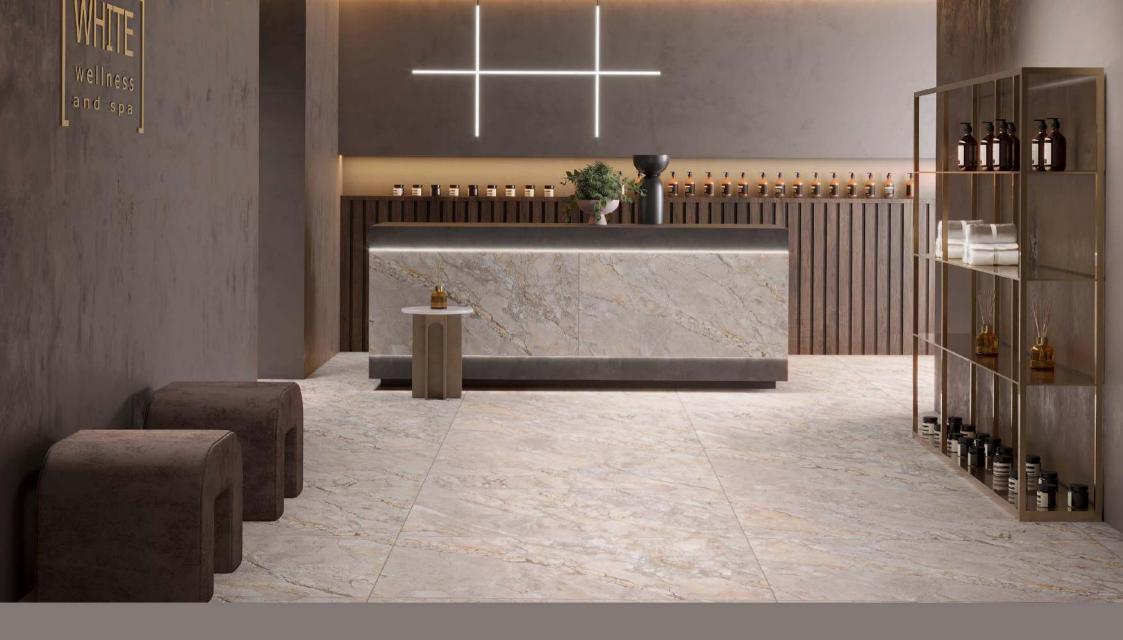



Amazon Grande





Random: 6


Size: 600x1200mm

Shape touch.







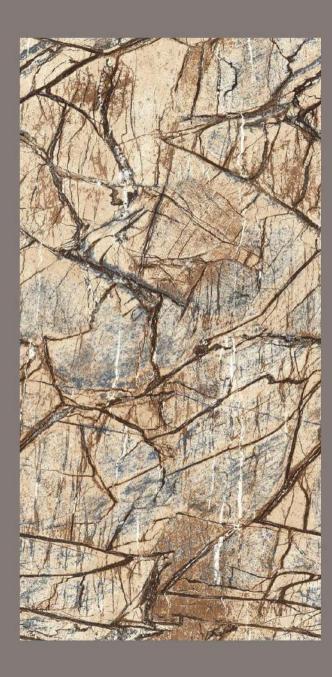

Gordian Brown





Random: 6

Size : 600x1200mm

Shape touch.









Nivea Silver





Random: 6

Size: 600x1200mm

Shape touch.









Sabbia





Random: 6

Size : 600x1200mm

Shape touch.









Terra Natural





Random: 6

Size : 600x1200mm

Shape touch.









Travertino Romano





Random: 6

Size : 600x1200mm

Shape touch.









Arkety Grande





Random: 6

Size : 600x1200mm

Shape touch pro









Tivoli Grey





Random: 6

Size: 600x1200mm

Shape touch pro









UNICA BLANCO





Random: 6

Size : 600x1200mm

Shape touch pro





TECHNICAL SPECIFICATION

	CHARACTERISTIC	STANDARD AS PER ISO-13006/ EN14411 GROUP Bla	MAIN VALUE OF ITALUS DOUBLE CHARGE VITRIFIED TILES	TEST METHOD
Regulatory Properties	Deviation In Length & Width	± 0.50%	± 0.10%	ISO-10545-2
	Deviation In Thickness	± 5.00%	± 2.00%	ISO-10545-2
	Straightness of Sides	± 0.50%	± 0.10%	ISO-10545-2
	Rectangularity	±0.50%	± 0.10%	ISO-10545-2
	Surface Flatness	± 0.50%	± 0.10%	ISO-10545-2
	Color Differences	Unaltered	No Change	ISO-10545-16
	Glossiness	As per Manufacture	Min.90 %*	Glossometer
	Surface Quality	Min.95% tiles should be free from visible defect	Conforms	ISO 10545-2
Structural Properties	Water Absorption	≤0.50 %	E≤0.50%	ISO 10545-3
	Apparent Density	> 2.00 gm/cc	> 2.28 gm/cc	DIN 51082
Massive Mechanical Properties	Flexural Modulus Of Rupture	Min. 35N/mm²	Min. 40N/mm²	ISO-10545-4
	Flexural Breaking Strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
	Impact Resistance	As Per Manufacturer	Min. 0.55	ISO-10545-5
	Deep Abrasion Resistance	Max. 175mm³ Max.	Max. 132mm ³	ISO-10545-6
Surface Mechanical Properties	Moh's Hardnes	Min. 6	≥6*	EN101
Thermo Hygrometric Properties	Frost Resistance	No. Damage	Frost Proof	ISO -10545-12
	Thermal Shock Resistance	No. Damage	No. Damage	ISO -10545-9
	Moisture Expansion	Declared Value	Nil	ISO -10545-1
	Thermal Expansion	Max.9.0 X 10 ⁻⁶	Max. 6.5 X 10 ⁻⁶	ISO -10545-8
OhI D	Resistance of House Hold Chemical	No. Damage	No. Damage*	ISO -10545-13
Chemical Properties	Stain Resistance	Resistance	Resistance*	ISO -10545-1
Safety Properties	Slip Resistance(friction Co Efficient)	>0.40	>0.40	ISO -10545-17

[°] Glossiness 90 % with Nano Technology, ° With Nano Technology, ° Except Hydrofluoric Acid & it's compound, ° For Unpolished Vitrified Tile

PACKING DETAIL

Sr.No.	SIZE	NO. OF TILES PER BOX	COVERAGE AREA
01	600x1200 mm	2 Pic.	1.44 Sq.Mtr.

Note: Color Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.



